



Turn Around family

Carlotta de Bevilacqua

Artemide®

**turn around
family**

Turn Around

Carlotta de Bevilacqua
2019


Turn Around inverts the approach to the light system, starting from the principles of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction.

It is a combination of different structural and lighting solutions that adapt to last-minute space thanks to its minimal section.

It is a composition based on a very small track, with a patented section dictated by the standard thickness of plasterboard, meaning it can be inserted into the available space in any situation.

Various linear, 90° angle and curved modules can be combined with electrical and mechanical continuity, availing of the utmost freedom to create every different shapes.

PATENT OF INVENTION: ELECTRO-MECHANICAL SECTION
PATENT OF INVENTION: SHARP



ARTEMIDE
APP



For further information on Turn Around
visit [artemide.com](https://www.artemide.com)




Turn Around is an innovative system

The freedom to design light in space is ensured by the flexibility to combine different geometries within the structure and also by the possibility to integrate different performances.

Indeed, the same track can accommodate a linear module for diffused light, plus sharpening, spot and suspension modules.



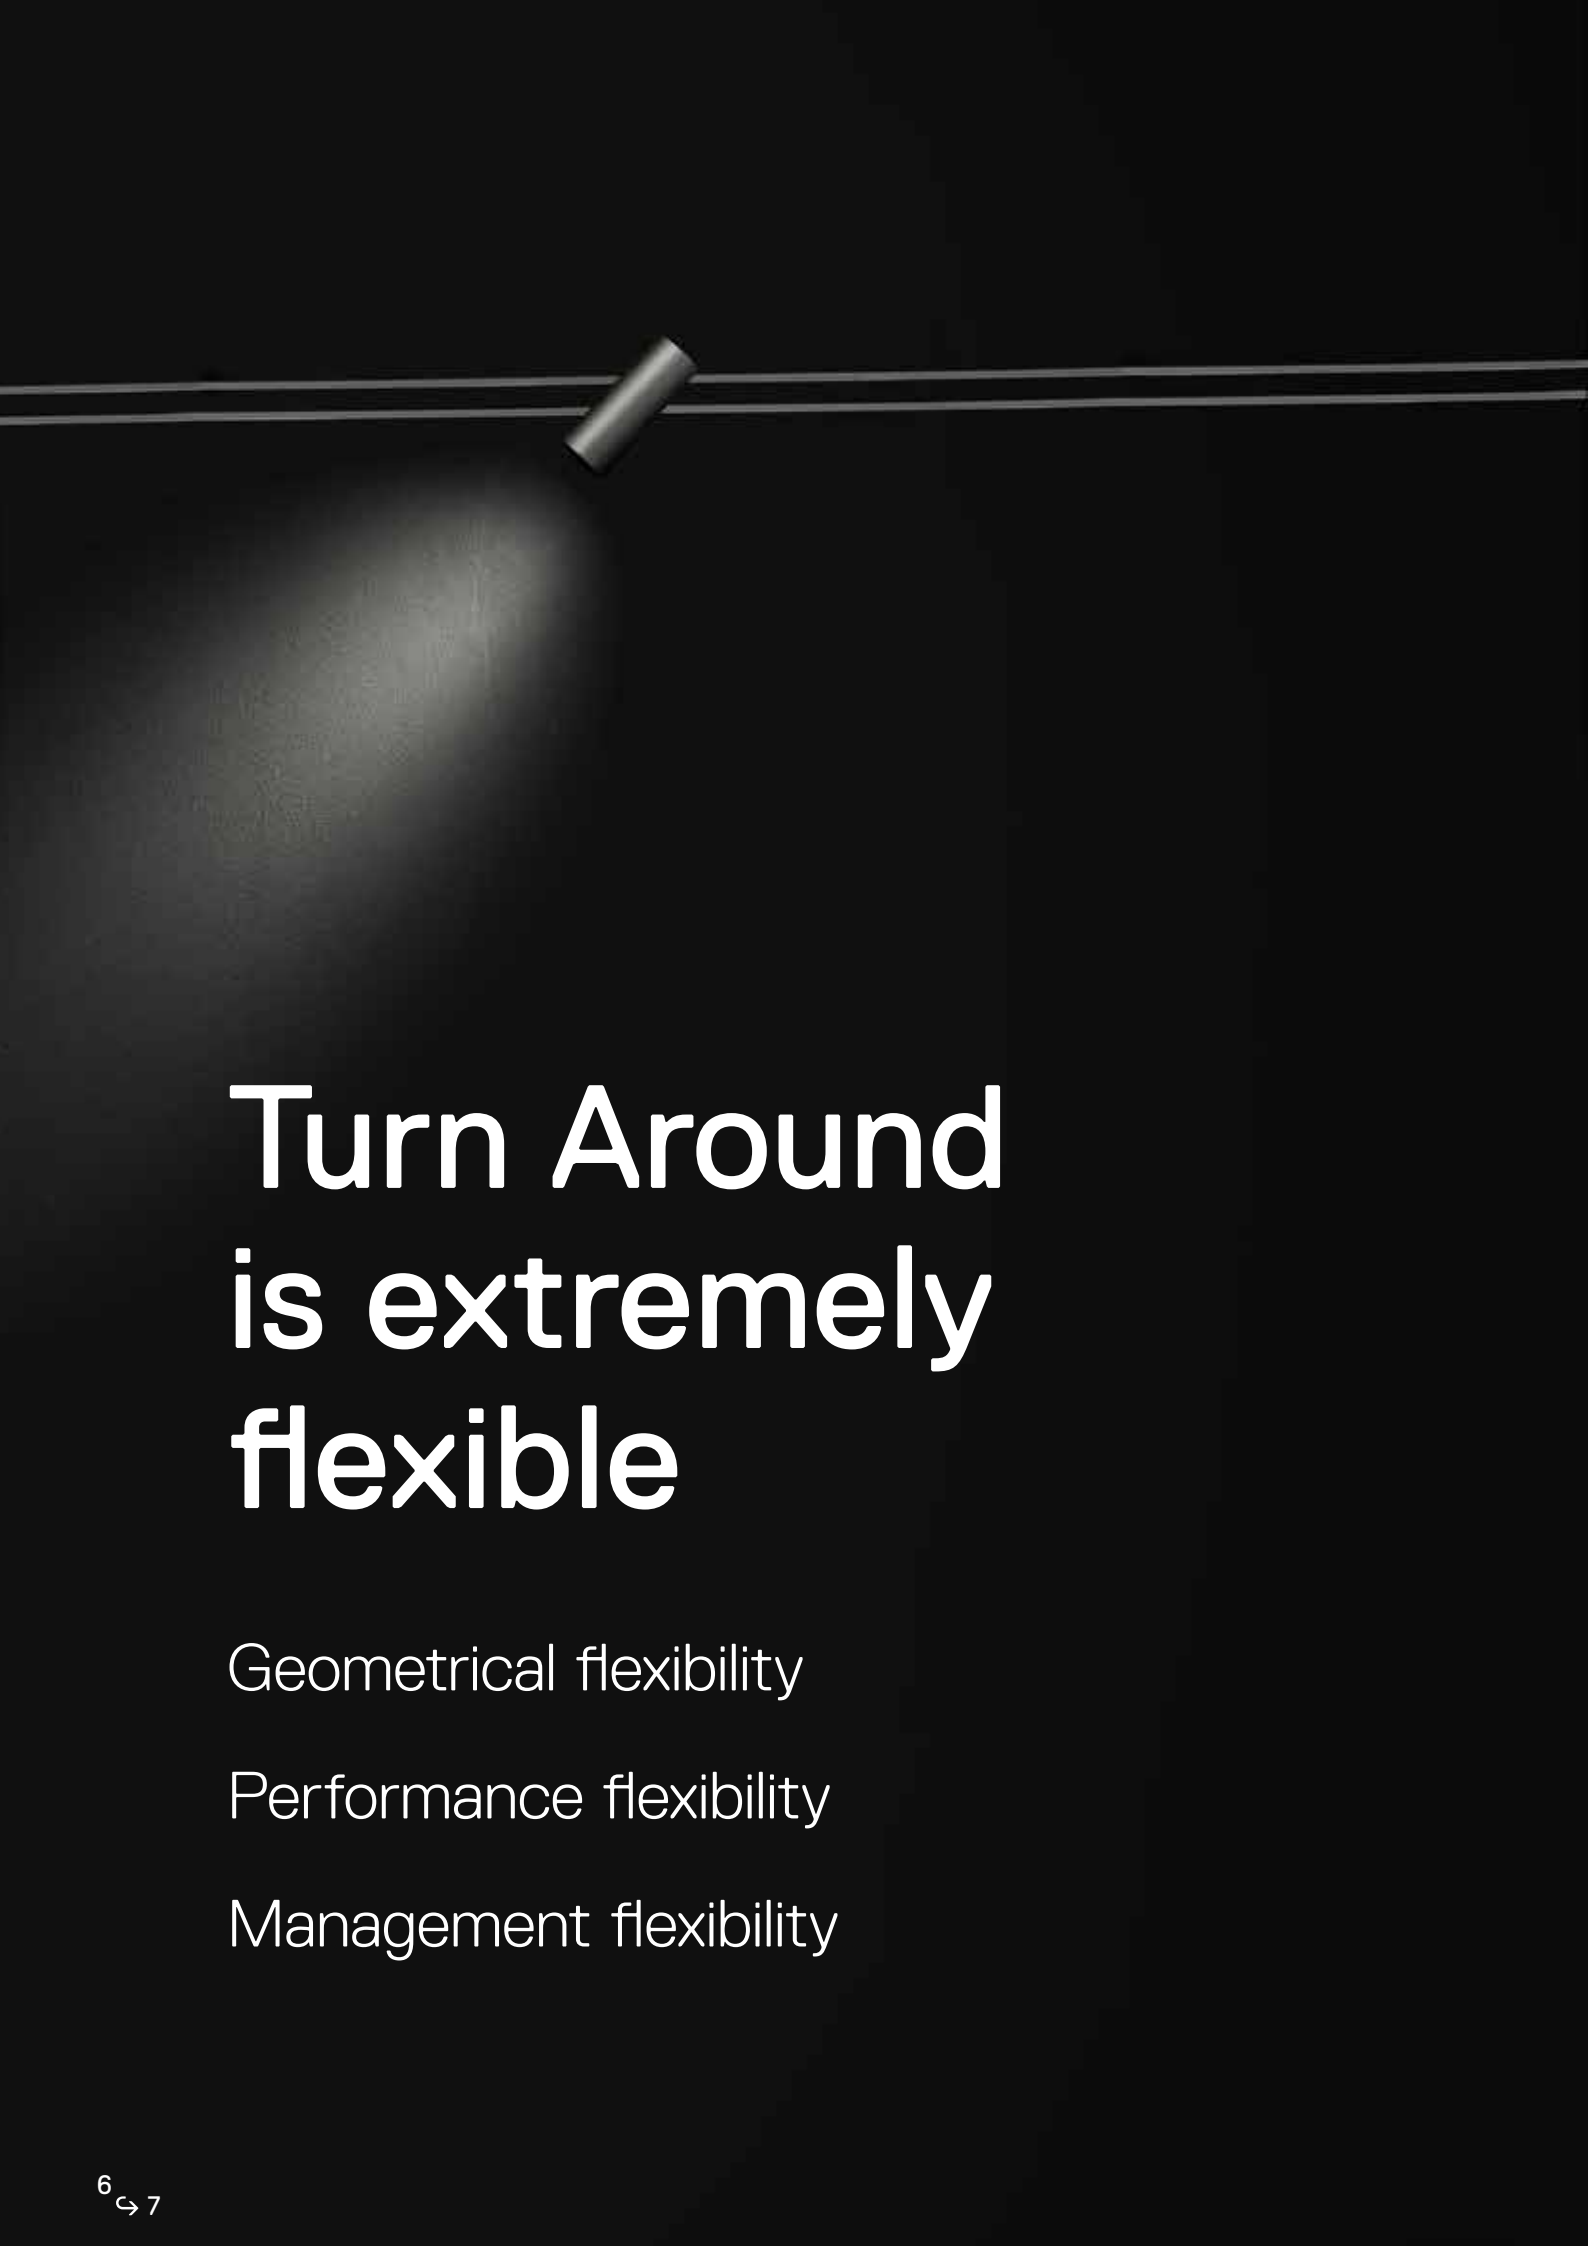


Turn Around is extremely flexible

Geometrical flexibility

Performance flexibility

Management flexibility

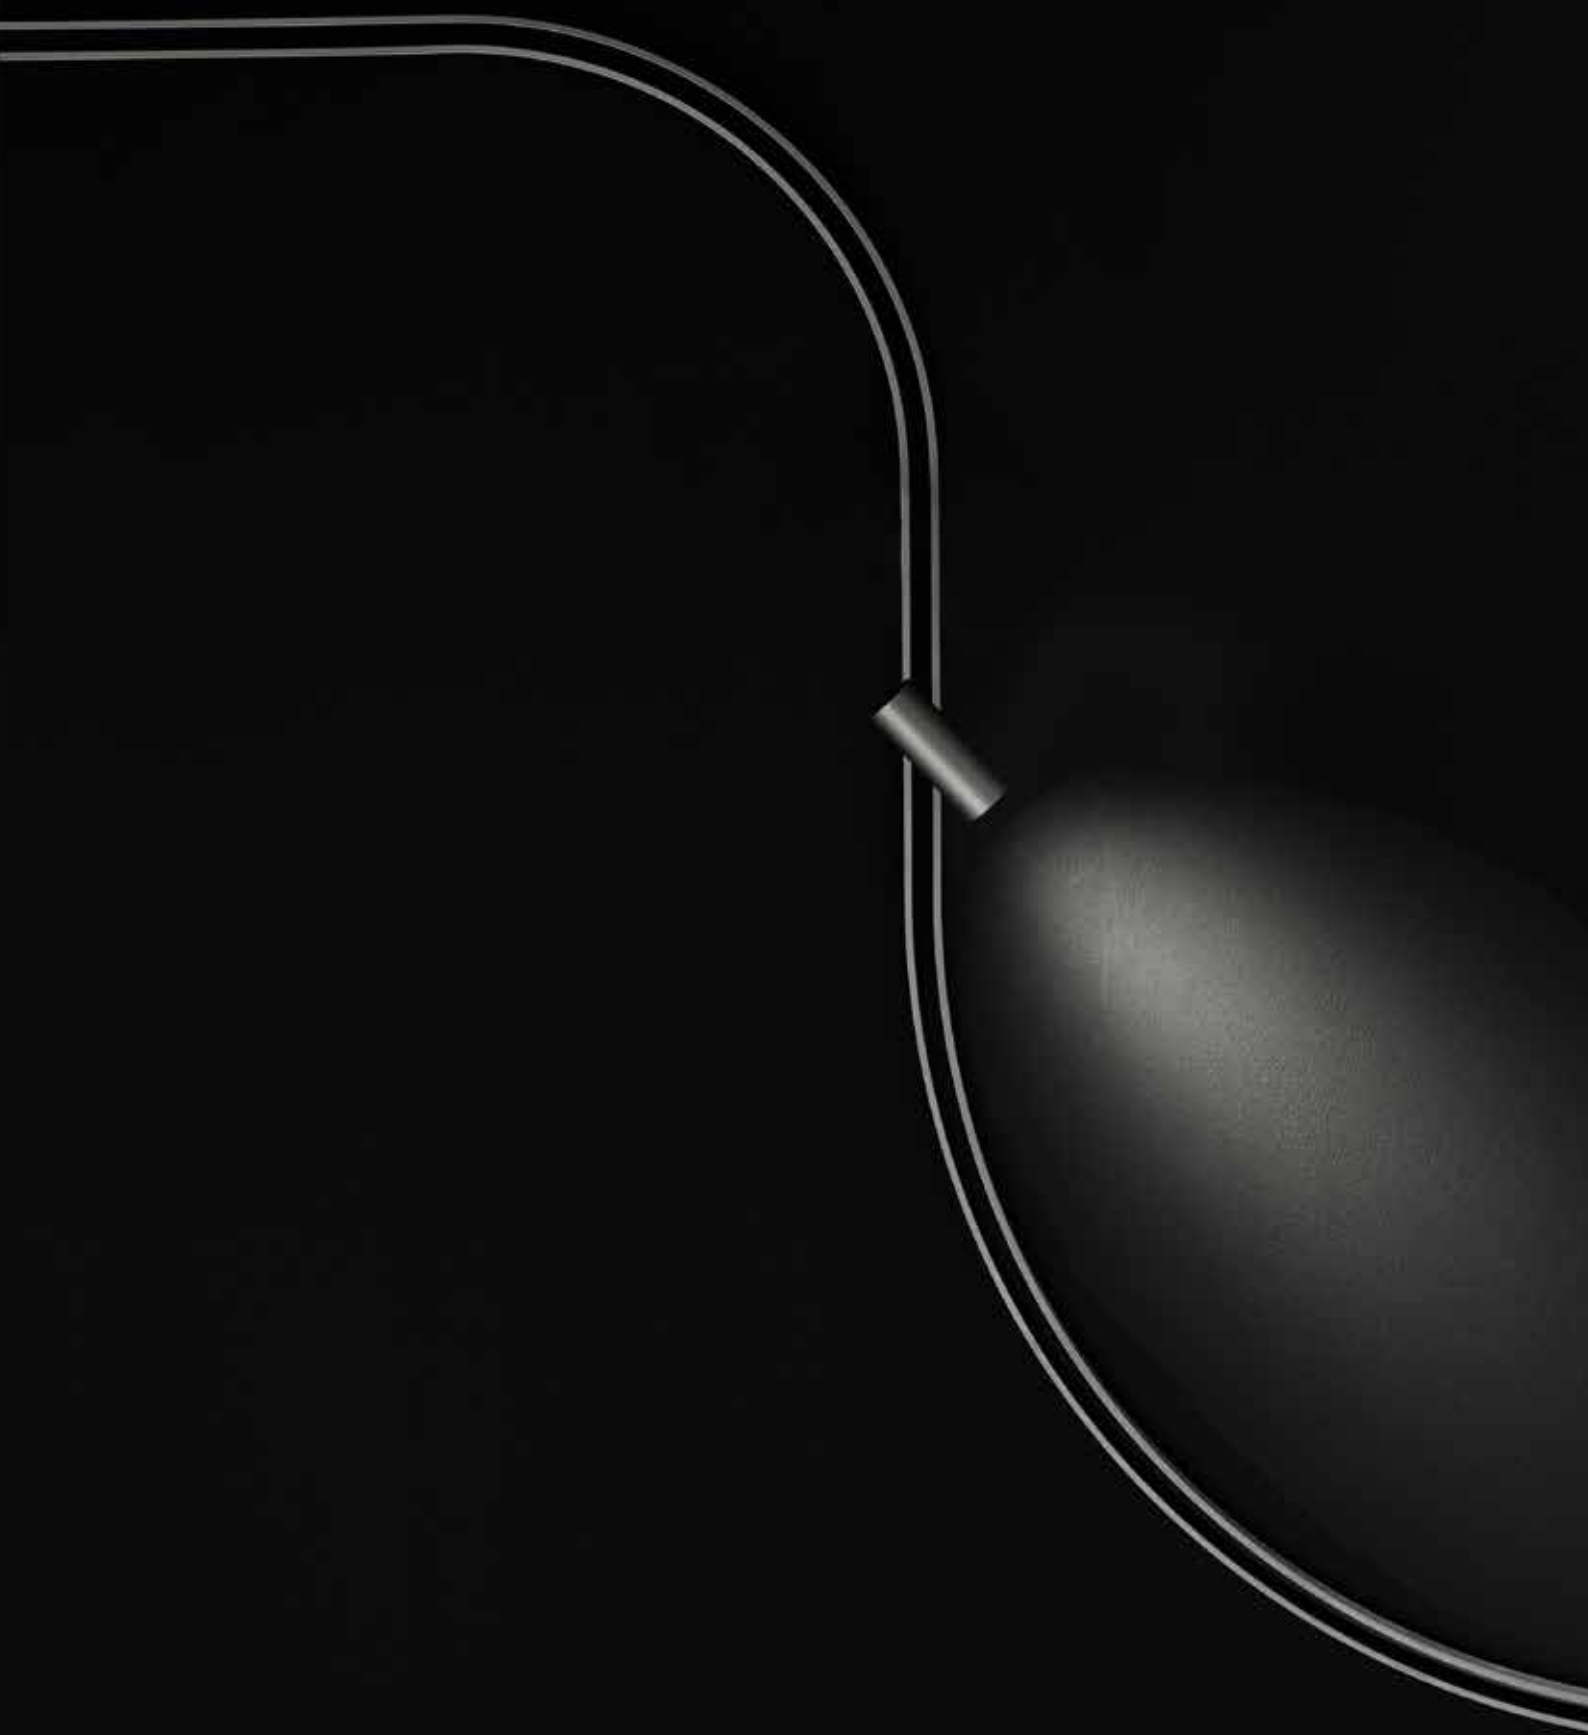

Reduce to innovate

Energetic Infrastructure

A single continuous energetic infrastructure that accommodates various light performances.

48V

Powered at 48V, there are no practical length limits of the system but only of installed power.

Electronic Bridge

An “invisible” joint permits to transfer power and D.Art from one section to the following, allowing the possibility to insert endless diffused flexible modules.





Asserting one's spatial freedom


Challenging the fundamental sustainability

h 12.5 X 23 mm for recessed version

Profile dimensions can be integrated into the standard plasterboard thickness without interfering with the structural warping.

Recessed / SMD / suspension

The profile is integrated into the space in the built-in, ceiling and suspension versions.

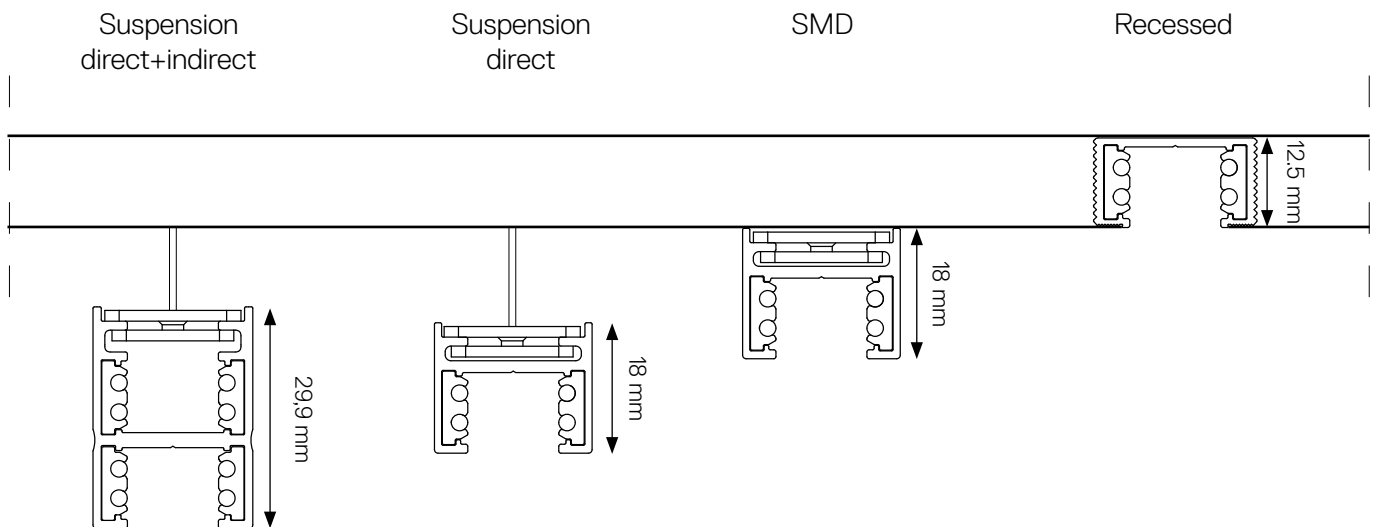


→ False ceiling scheme

Structural Warping

Structural Warping

Plasterboard - 12.5 mm
thickness

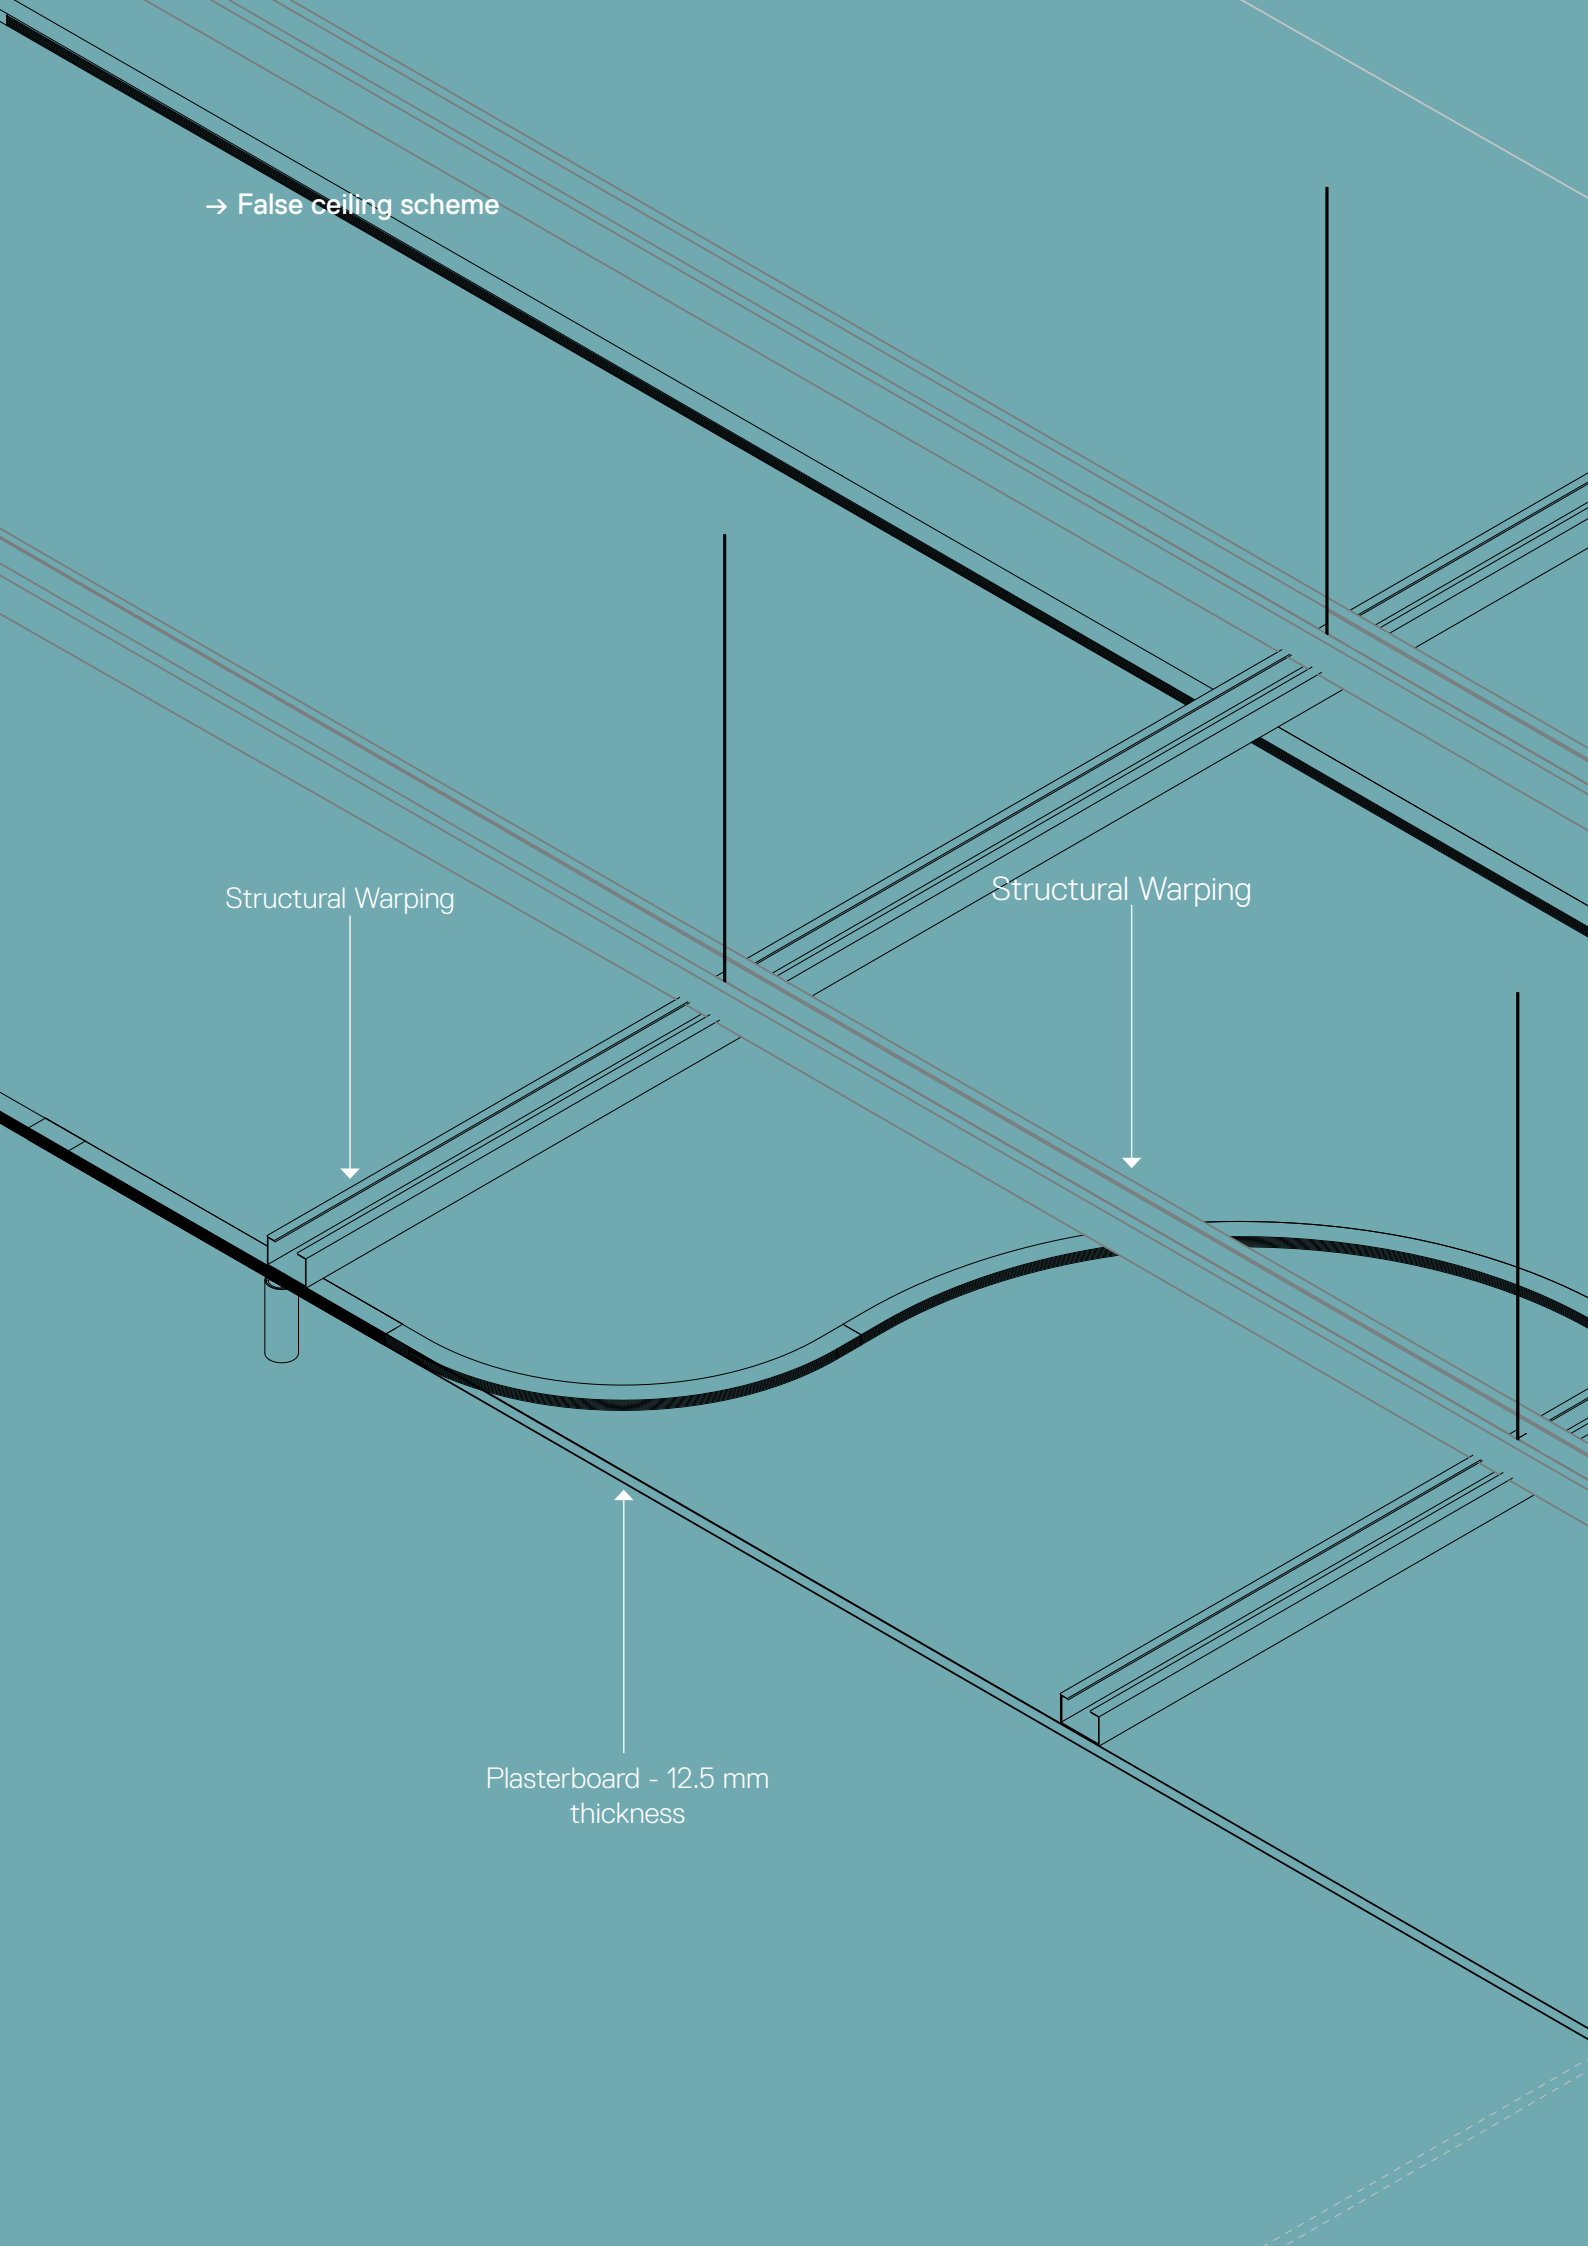

Turn Around infrastructure

Integrating different performances

Track 48V

23 x h 12,5 mm (Recessed)

22 x h 18 mm (SMD, suspension direct)

22 x h 31 mm (Suspension direct+indirect)

1000/2000/3000 mm


● Black (Recessed)

● Titanium (SMD, Suspension)

Angular and curved elements


Curves: 90°

Rays: 700 mm, 470 mm, 270 mm

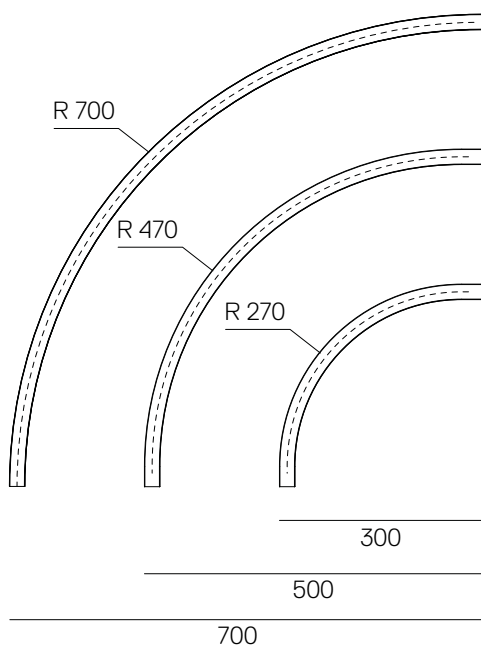

Curves: 60°

Rays: 700 mm, 470 mm, 270 mm

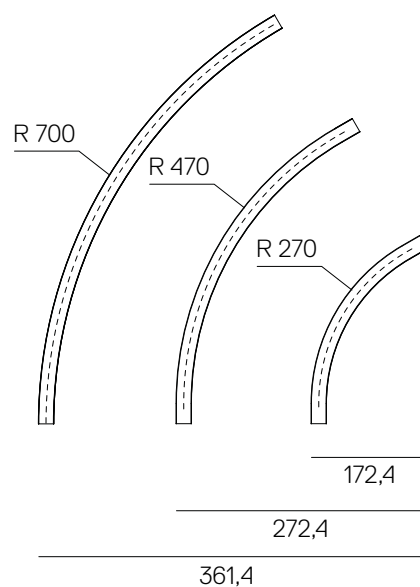

Linear elements recessed



1000 mm



2000 mm



3000 mm

Linear elements SMD - Suspension direct emission



1000 mm



2000 mm



3000 mm

Linear elements suspension direct + indirect emission



1000 mm




2000 mm



3000 mm


Curves: 45°

Rays: 700 mm, 470 mm, 270 mm

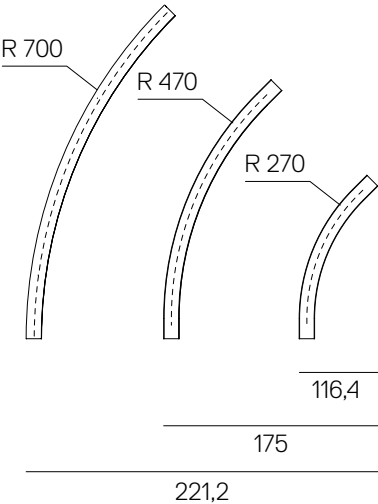


90° Angle

same plane recessed




90° Angle

same plane
suspension direct
emission and SMD



90° Angle

same plane
suspension direct +
indirect emission




One body for all the light appliances



Vector

Vector pendant

Square

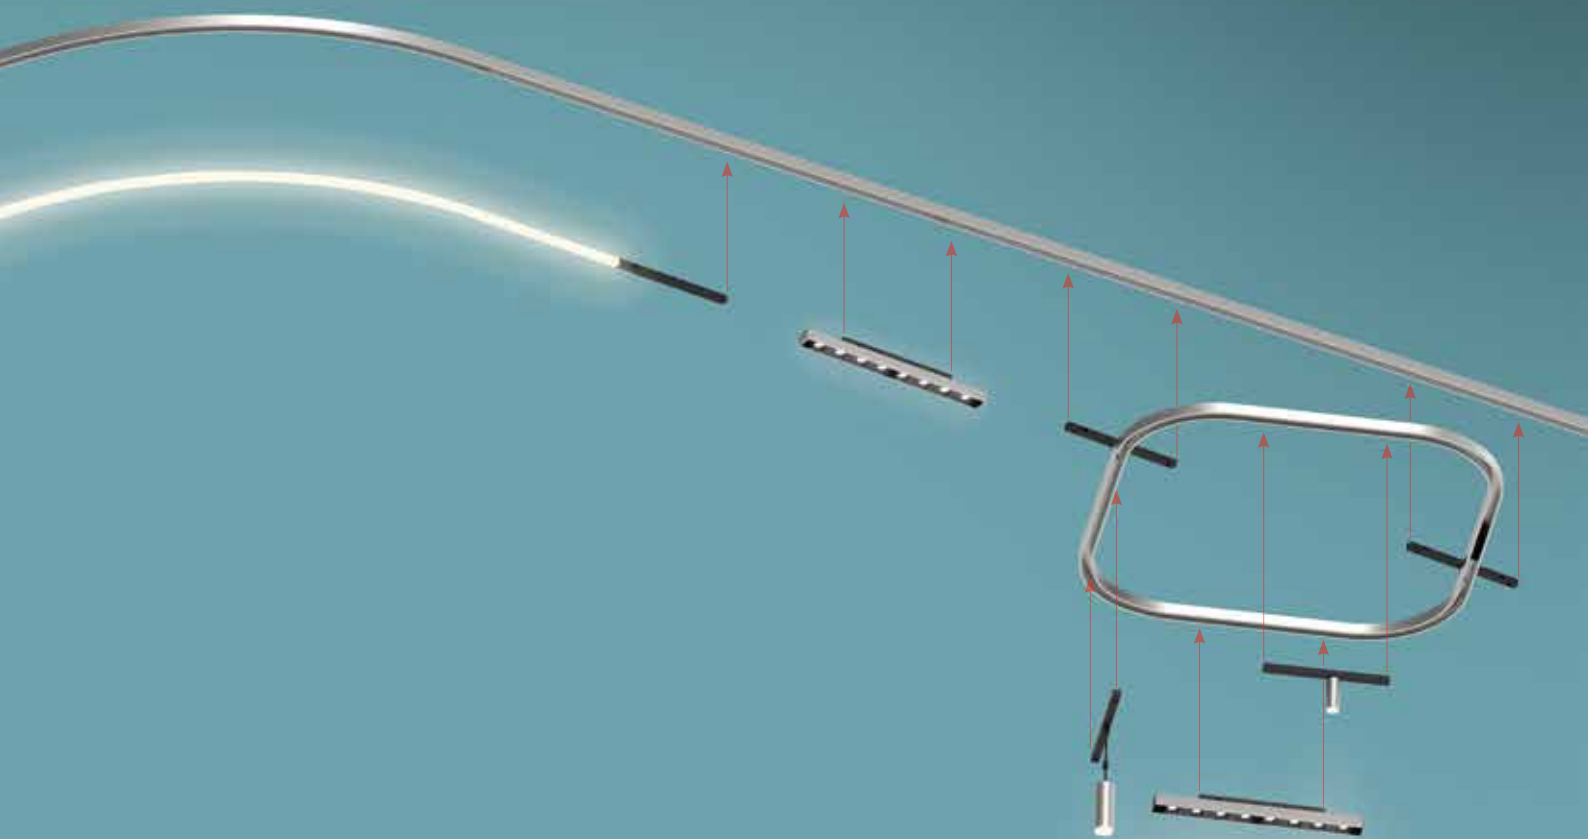

Diffused flexible module

Sharp or Diffused
linear module



Square track
+ Vector
+ Vector pendant
+ Sharp

Turn Around light appliances

Integrating different performances

Diffused flexible module

15 x h 10 mm
540 lm/m installed
9 W/m
3000 K
Max length 4,5 m




Vector 30 pendant

Ø 30 x h 77 mm
335 lm* - 7 W

Vector 40 pendant

Ø 40 x h 103 mm
584 lm* - 10 W

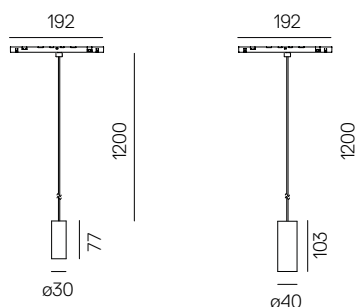

Vector 20


Ø 20 x h 50 mm
180 lm* - 3,5 W

Vector 30

Ø 30 x h 77 mm
335 lm* - 7 W

Vector 40

Ø 40 x h 103 mm
584 lm* - 10 W




Sharp 8

315 x 27 x h 20 mm
1071 lm* - 14 W

Sharp 12

464 x 27 x h 20 mm
1607 lm* - 19 W

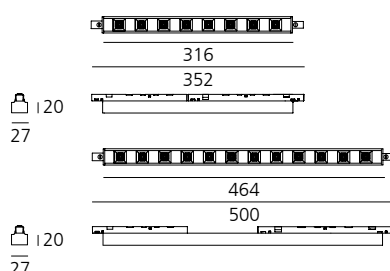

* 3000 K values.

Diffused linear module 600



599 x 27 x h 20 mm

1421 lm* - 15 W



Diffused linear module 1200

1187 x 27 x h 20 mm

2843 lm* - 30 W

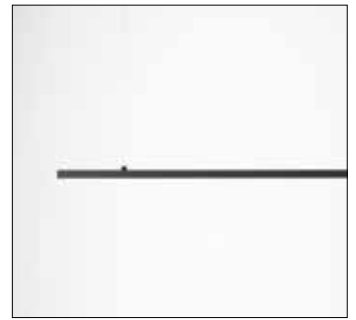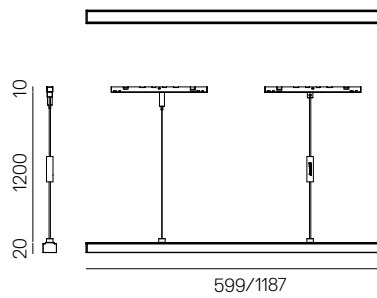**Horizontal square track**



590 x 590 x h 17,5 mm

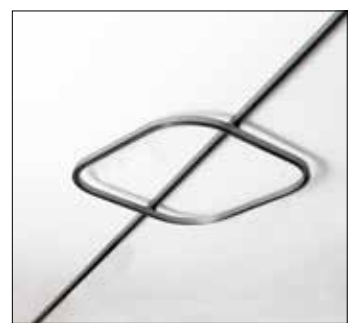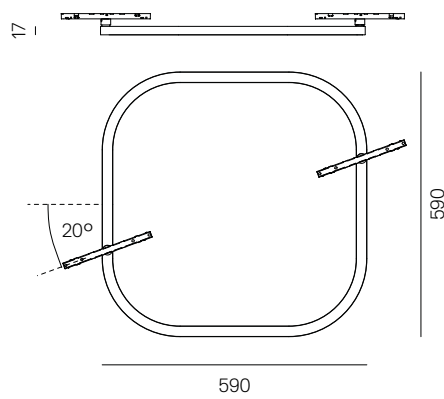**Horizontal square diffused Strip LED**

Diffused emission

590 x 590 x h 17,5 mm


1001 lm - 18 W

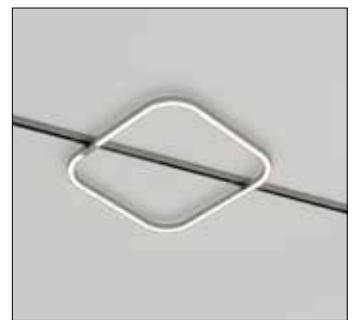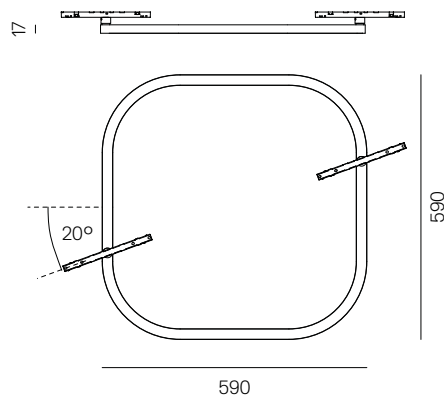**Vertical Square diffused Strip LED**

Diffused emission

590 x 590 x h 17,5 mm


976 lm* - 18 W

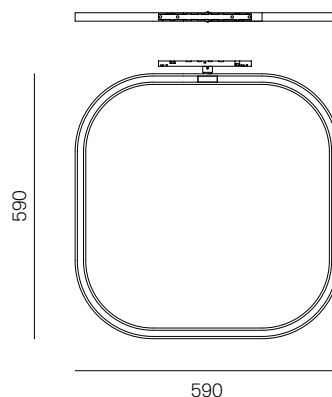

* 3000 K values.

Turn Around is powered at 48 Vdc

ELEVATION

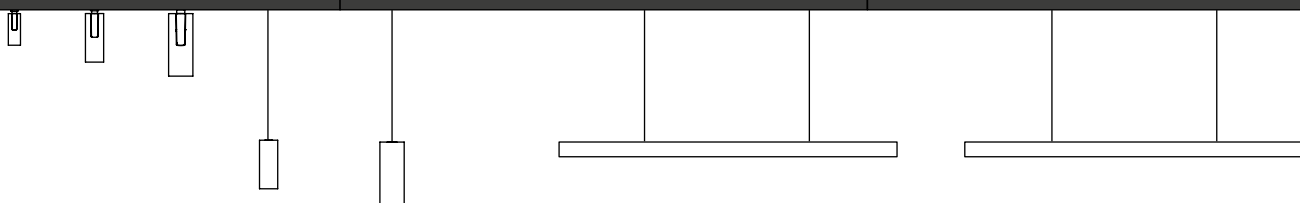

VECTOR 20

max 35 with 1 Power Supply 150W
max 60 with 1 Power Supply 240W
max 77 with 1 Power Supply 320W

VECTOR 30/VECTOR 30 PENDANT

max 17 with 1 Power Supply 150W
max 30 with 1 Power Supply 240W
max 38 with 1 Power Supply 320W

VECTOR 40/VECTOR 40 PENDANT

max 12 with 1 Power Supply 150W
max 21 with 1 Power Supply 240W
max 27 with 1 Power Supply 320W

DIFFUSED LINEAR MODULE 600

max 8 with 1 Power Supply 150W
max 14 with 1 Power Supply 240W
max 18 with 1 Power Supply 320W

DIFFUSED LINEAR MODULE 1200

max 4 with 1 Power Supply 150W
max 7 with 1 Power Supply 240W
max 9 with 1 Power Supply 320W

SHARP 8

max 8 with 1 Power Supply 150W
max 15 with 1 Power Supply 240W
max 19 with 1 Power Supply 320W

SHARP 12

max 6 with 1 Power Supply 150W
max 11 with 1 Power Supply 240W
max 14 with 1 Power Supply 320W

DIFFUSED

FLEXIBLE MODULE 2m

max 7 with 1 Power Supply 150W
max 12 with 1 Power Supply 240W
max 15 with 1 Power Supply 320W

FLEXIBLE MODULE 4,5m

max 3 with 1 Power Supply 150W
max 5 with 1 Power Supply 240W
max 7 with 1 Power Supply 320W


PLAN

SQUARE INSETS

VECTOR 20, 30, 40
max 3

VECTOR PENDANT
30, 40
max 3

SHARP 8
max 3







Turn Around is safe

a unique feature developed for a real
safe DALI interface.



D.Art is a technology designed by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.

The DALI signal is transformed to a “SELV” safety extra low voltage ensuring the total safety of the appliance.

Turn Around has been designed in compliance with international certifications.



Asserting electronic intelligence

Reduce to innovate





ARTEMIDE
APP

Artemide APP

Real time freedom not only during installation but also in the interaction through Artemide App that manages the DALI addresses present in the system.



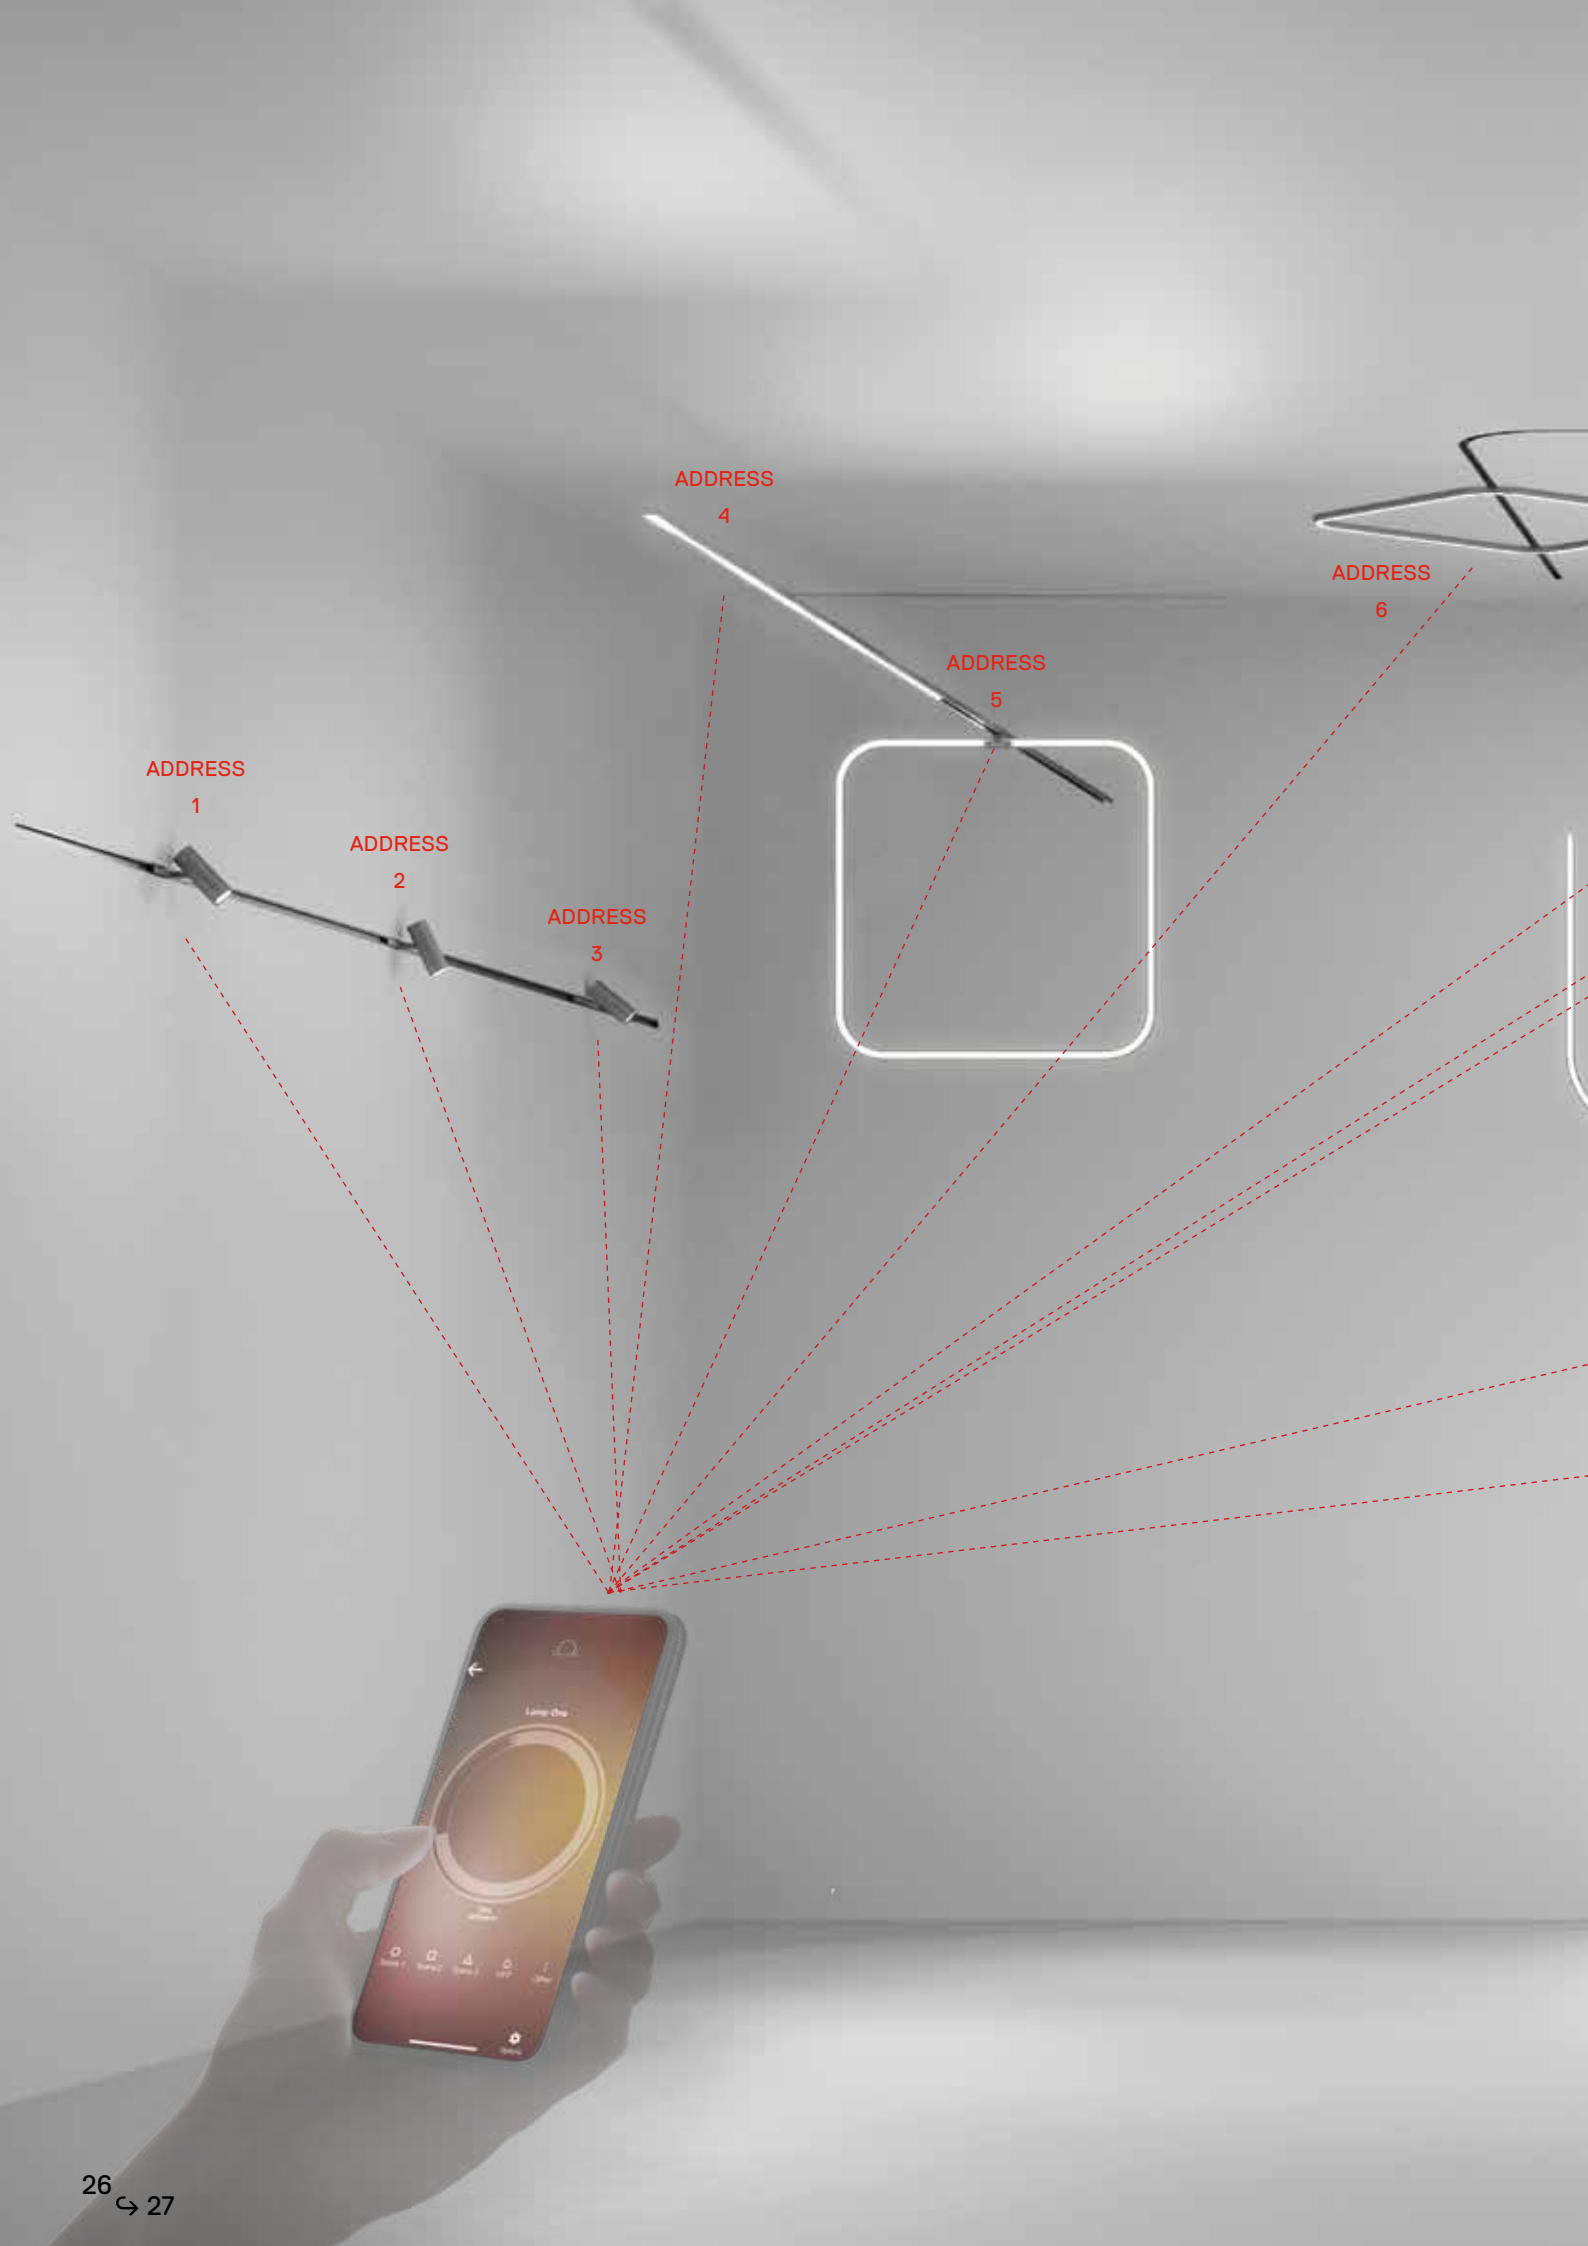


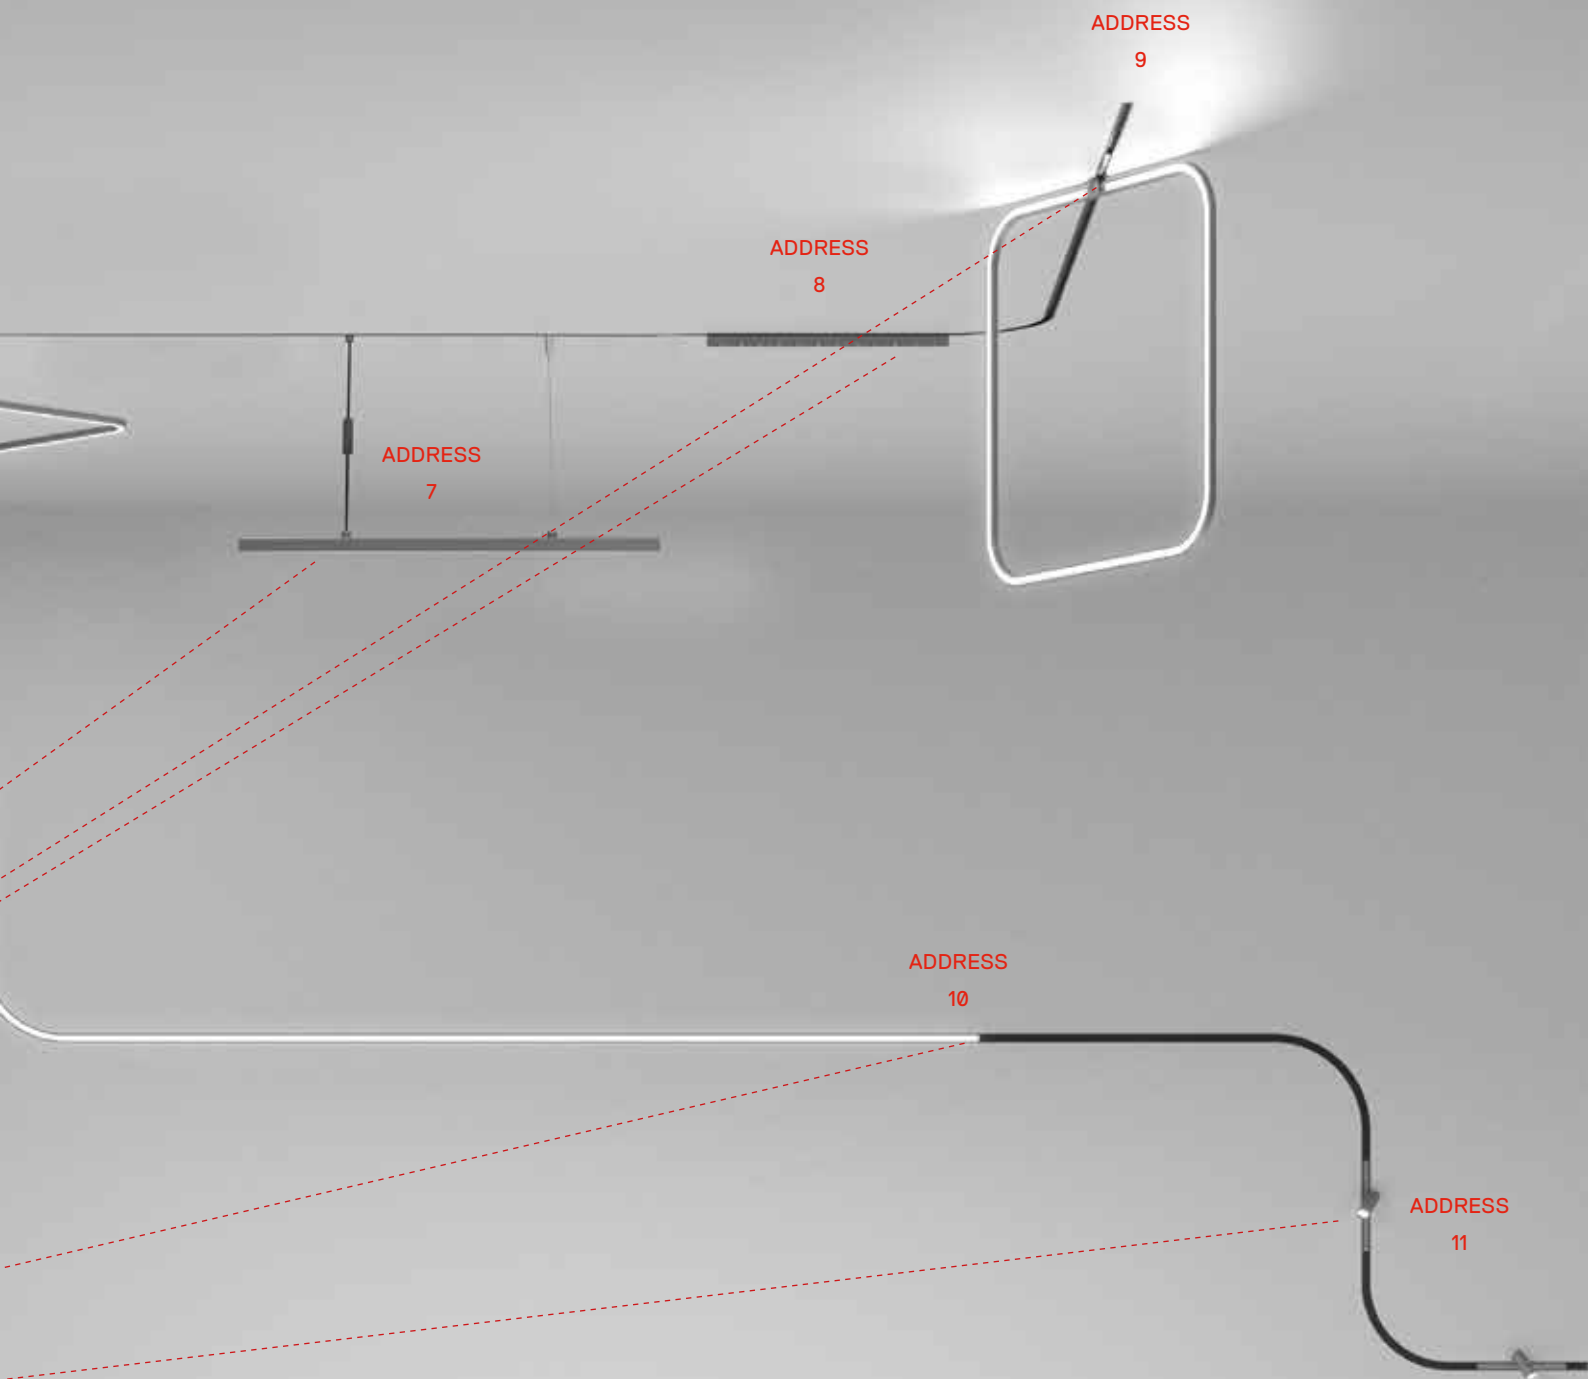

Turn Around is fully addressable







Each lighting appliance can be managed separately by Artemide App or by DALI control.

Turn Around power supply

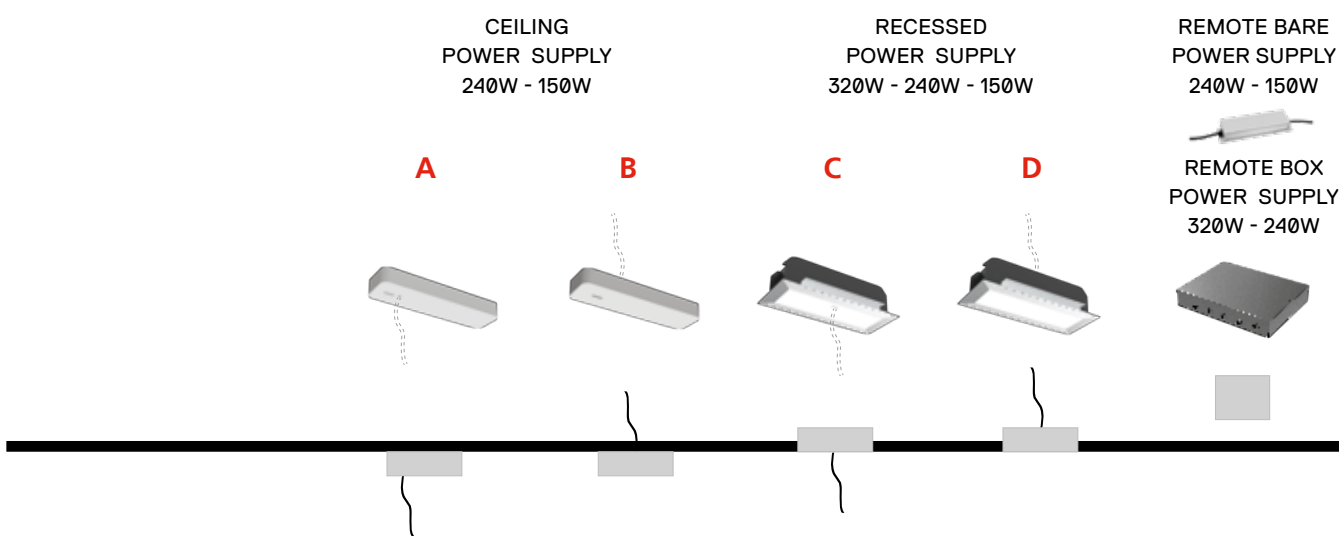


SUSPENSION

SMD					
RECESSED					

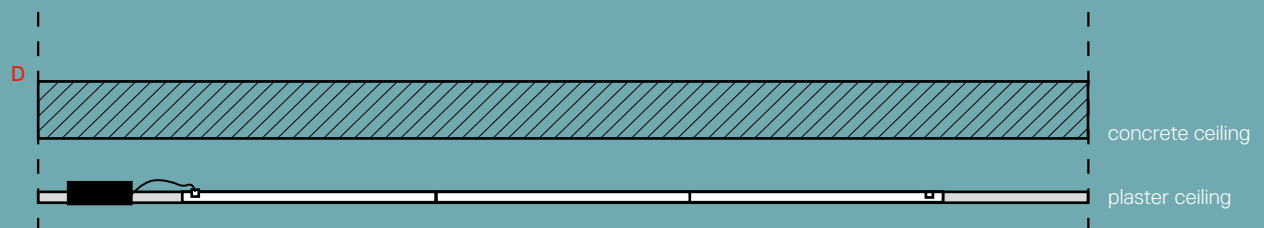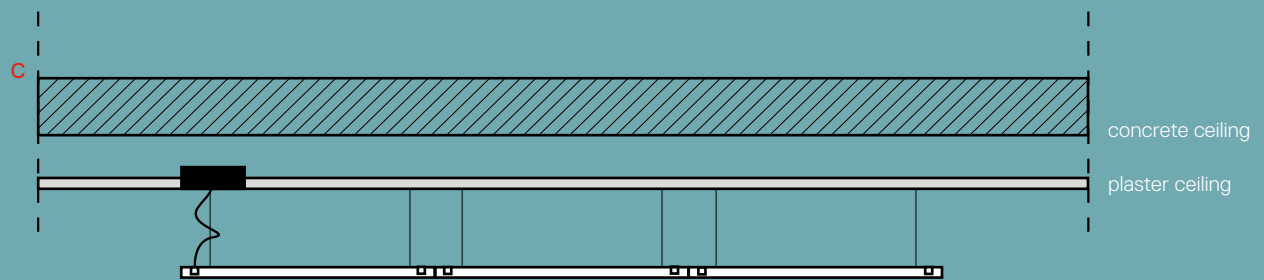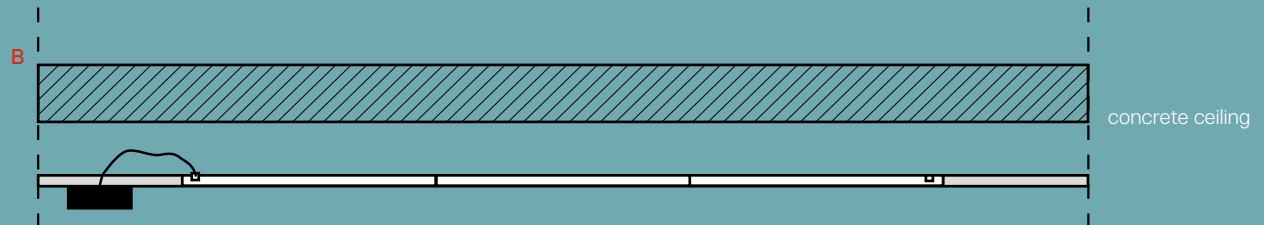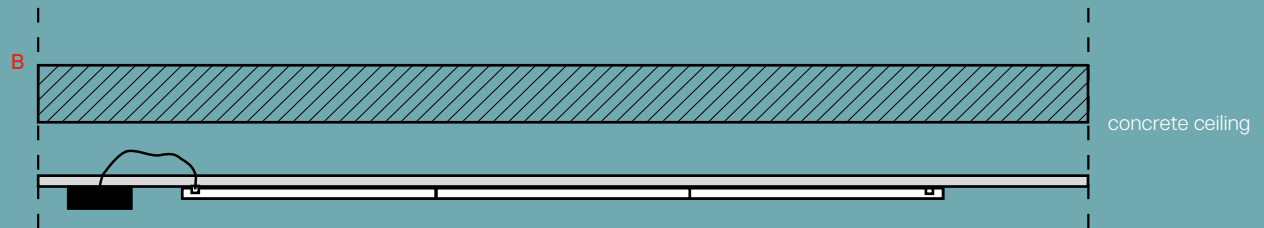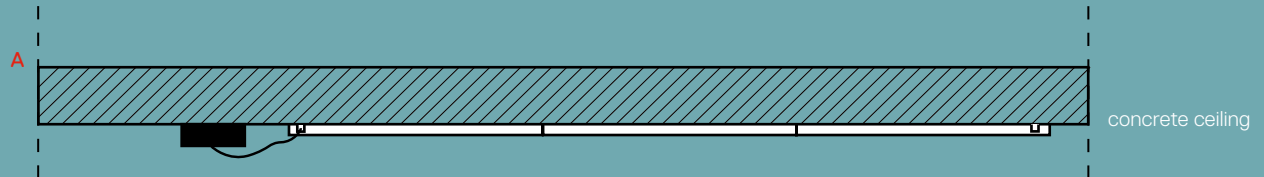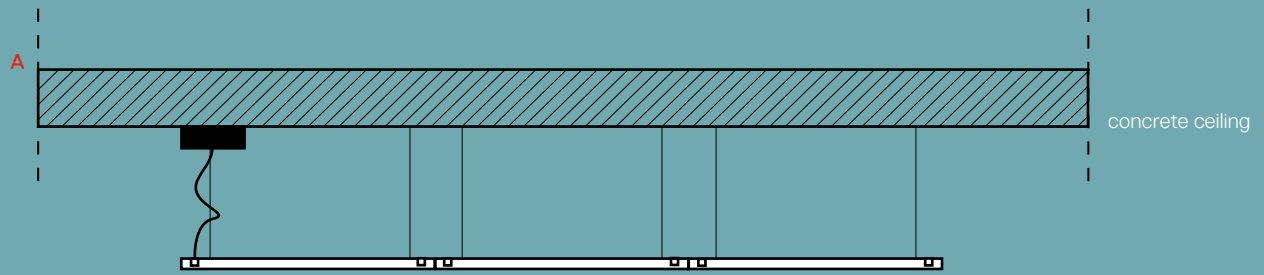

Turn Around structural track

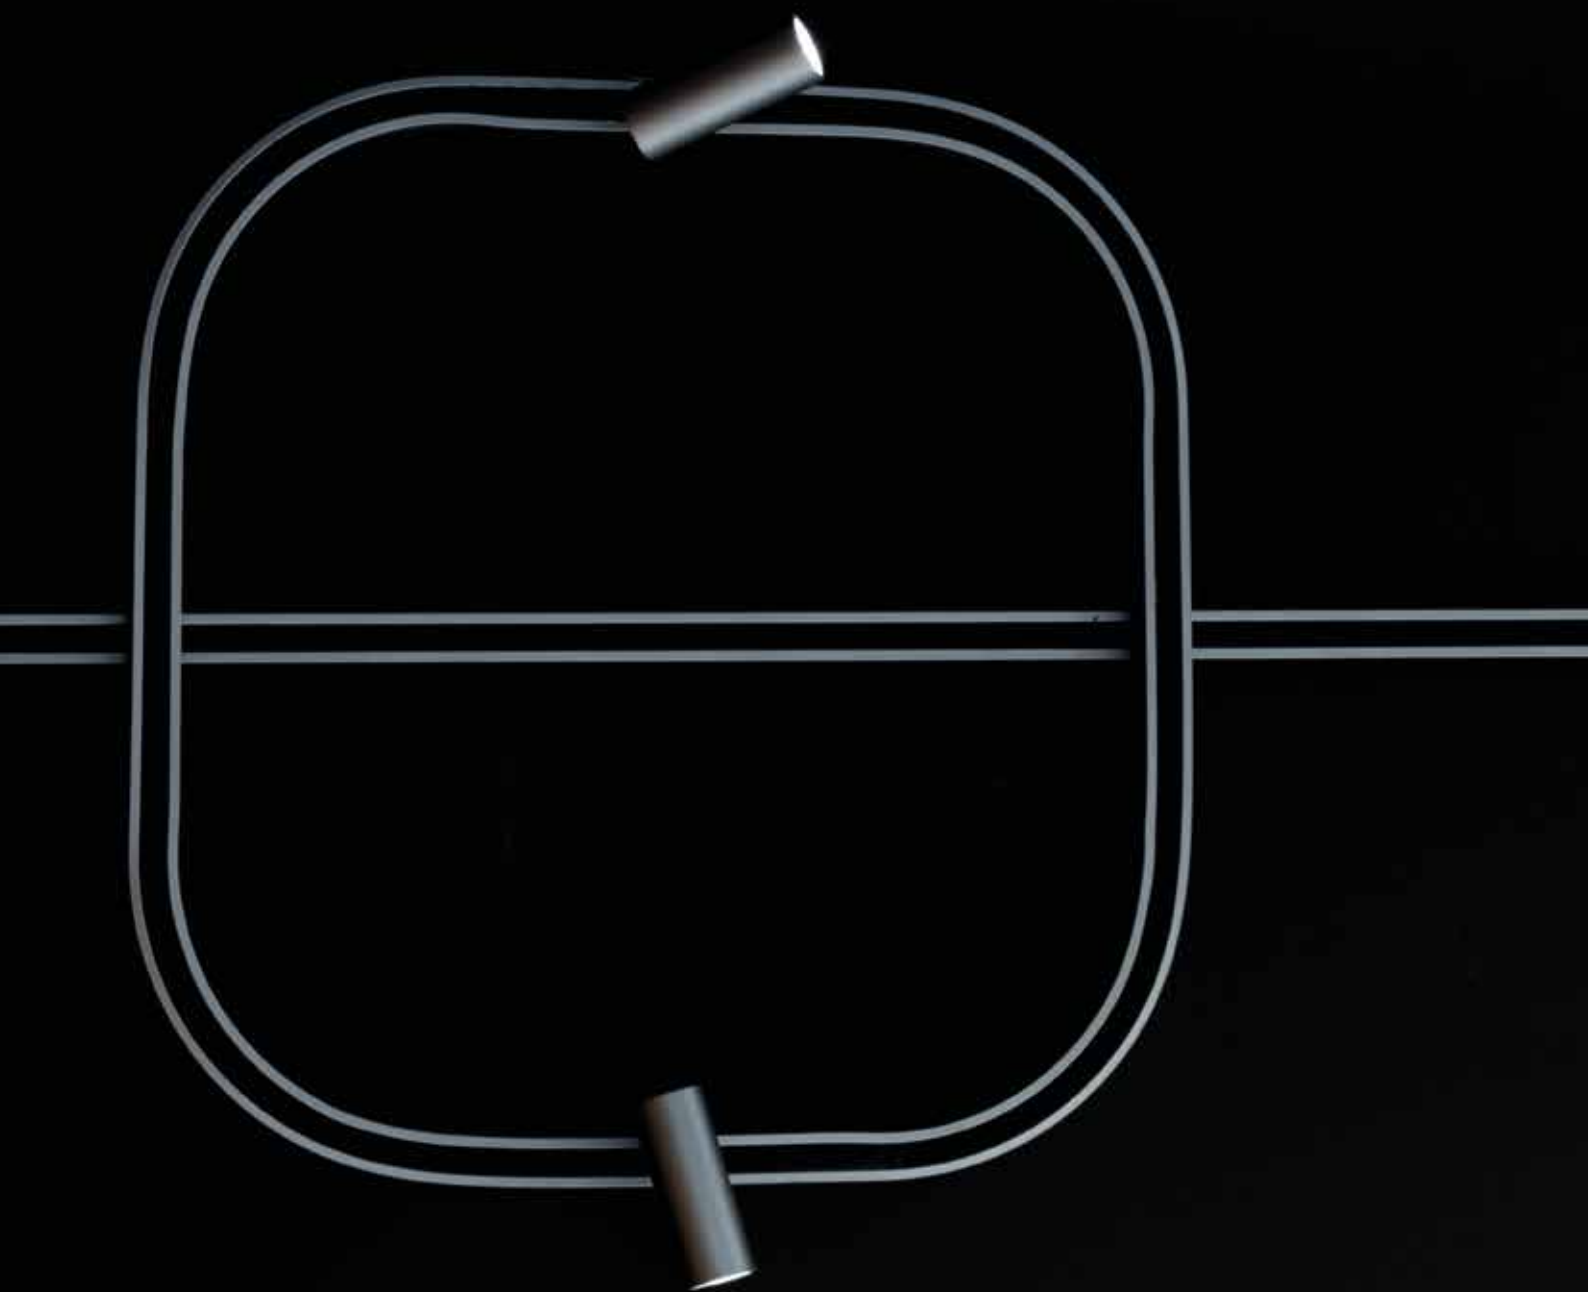

TURN AROUND RECESSED TRACK

Black

IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA00104
TA00204
TA00304





12,5 23

Angle elements

90° on same plane track angle elements
50 x 50 mm

Code

TA80004



Curved joining elements

Radius Angle

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA30004

TA30304

TA30604

TA30104



TA30404

TA30704


TA30204

TA30504


TA30804



60°



90°



Accessories



Fed end cap
Cable L= 2500 mm

Code

TA90600



Recessed Fixing Kit (7pcs)
Linear element L= 3000 mm uses 7pcs
Linear element L= 2000 mm uses 5pcs
Linear element L= 1000 mm uses 3pcs

TA90100



Electro-Mechanical Joint Kit

TA90000

Accessories for cutting components of linear elements

Shaping tool: to shape insulating conductor support

Code

TA00000






Locking tool: to lock insulating conductor spacer into aluminum profile

TA00100

Note: no tools provided to cut aluminum profile.

White Titanium



Power supply	Undimmable	DALI/0-10/1-10/PUSH	Dimmable APP
 320 W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107h	Code TA66001	Code TA66101	Code TA66101APP
 240 W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107h	TA61901	TA62001	TA62001APP
 150 W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107h	TA61701	TA61801	TA61801APP
 240 W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50h	☐ TA60501 ☒ TA60722	☐ TA60601 ☒ TA60822	☐ TA60601APP ☒ TA60822APP
 150 W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50h	☐ TA60101 ☒ TA60322	☐ TA60201 ☒ TA60422	☐ TA60201APP ☒ TA60422APP
 320 W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5h		TA68000	TA68000APP
 240 W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5h		TA62500	TA62500APP
 240 W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38h	TA98000		
 150 W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38h	TA98100		
 DALI/0-10/1-10/PUSH SELV Interface 103x67x21h		DV1061	

Optional control devices - BLL wireless switch

	Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	DV1080APP
---	---	------------------

TURN AROUND SMD TRACK

Titanium

IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA10122
TA10222
TA10322




Angle elements

90° on same plane track angle elements
75 x 75 mm

Code

TA80122



Curved joining elements

Radius Alpha

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA40022

TA40322

TA40622

TA40122




TA40422

TA40722

TA40222

TA40522

TA40822



Accessories

Fed end cap
Cable L= 2500 mm



Code

TA90600

Ceiling bracket Kit (4pcs)
Linear element L= 3000 mm uses 4pcs
Linear element L= 2000 mm uses 3pcs
Linear element L= 1000 mm uses 1pcs



TA90400



Electro-Mechanical Joint Kit



TA90200

White Titanium



Power supply	Undimmable Code	DALI/0-10/1-10/PUSH Code	Dimmable APP Code
 240 W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 ⓘ 400x110x50h	☐ TA61301 ☒ TA61522	☐ TA61401 ☒ TA61622	☐ TA61401APP ☒ TA61622APP
 150 W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 ⓘ 400x110x50h	☐ TA60901 ☒ TA61122	☐ TA61001 ☒ TA61222	☐ TA61001APP ☒ TA61222APP
 240 W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20 ⓘ 400x110x50h	☐ TA60501 ☒ TA60722	☐ TA60601 ☒ TA60822	☐ TA60601APP ☒ TA60822APP
 150 W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20 ⓘ 400x110x50h	☐ TA60101 ☒ TA60322	☐ TA60201 ☒ TA60422	☐ TA60201APP ☒ TA60422APP
 320 W Remote box power supply kit 230VAC-48VDC IP20 ⓘ 313x243x57,5h		TA68000	TA68000APP
 240 W Remote box power supply kit 230VAC-48VDC IP20 ⓘ 313x243x57,5h		TA62500	TA62500APP
 240 W Bare power supply ON-OFF 230VAC-48VDC IP20 ⓘ (for dimmable version to be combined with "DV1061") 244x68x38h	TA98000		
 150 W Bare power supply ON-OFF 230VAC-48VDC IP20 ⓘ (for dimmable version to be combined with "DV1061") 244x68x38h	TA98100		
 DALI/0-10/1-10/PUSH SELV Interface 103x67x21h		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
 Max N.3 inputs for external push buttons.
 Max 1 m distance.
 Mains power supply required.
 To be installed inside flush mounting boxes or junction boxes.

DV1080APP

TURN AROUND SUSPENSION DIRECT TRACK

Titanium

IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA10122
TA10222
TA10322



22
18

Angle elements

90° on same plane track angle elements
75 x 75 mm

Code

TA80122



18
75
50
50
75

Curved joining elements

Radius Alpha

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA40022

TA40322

TA40622

TA40122

TA40422

TA40722


TA40222

TA40522


TA40822




45°



60°



90°



Accessories



Fed end cap
Cable L= 2500 mm

Code

TA90600



Suspension Kit (3pcs)
Linear element L= 3000 mm uses 3pcs
Linear element L= 2000 mm uses 2pcs
Linear element L= 1000 mm uses 2pcs

TA90500









Electro-Mechanical Joint Kit

TA90300

White Titanium



Power supply	Undimmable Code	DALI/0-10/1-10/PUSH Code	Dimmable APP Code
 320 W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107h	TA67001	TA67101	TA67101APP
 240 W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107h	TA62301	TA62401	TA62401APP
 150 W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107h	TA62101	TA62201	TA62201APP
 240 W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50h	☐ TA61301 ☒ TA61522	☐ TA61401 ☒ TA61622	☐ TA61401APP ☒ TA61622APP
 150 W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50h	☐ TA60901 ☒ TA61122	☐ TA61001 ☒ TA61222	☐ TA61001APP ☒ TA61222APP
 320 W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5h		TA68000	TA68000APP
 240 W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5h		TA62500	TA62500APP
 240 W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38h	TA98000		
 150 W Bare power supply ON-OFF 230VAC-48VDC IP20  (for dimmable version to be combined with "DV1061") 244x68x38h	TA98100		
 DALI/0-10/1-10/PUSH SELV Interface 103x67x21h		DV1061	

Optional control devices - BLL wireless switch

	Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	DV1080APP
---	---	------------------

TURN AROUND SUSPENSION DIRECT+INDIRECT TRACK

Titanium



*Delivery time on demand

IP20



Linear elements

Length

1000 mm

2000 mm

3000 mm


Direct + Indirect

Code

TA20122

TA20222

TA20322



Angle elements


90° on same plane track angle elements

75 x 75 mm

Direct + Indirect

Code

TA80222



Curved joining elements*

Radius

300 mm

Alpha

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Direct + Indirect

Code

TA50022

TA50322

TA50622

TA50122




TA50422

TA50722


TA50222

TA50522

TA50822



Accessories



Fed end cap

Cable L= 2500 mm

Code

TA90800



Suspension Kit (3pcs)

Linear element L= 3000 mm uses 3pcs

Linear element L= 2000 mm uses 2pcs

Linear element L= 1000 mm uses 2pcs

TA90500








Electro-Mechanical Joint Kit

TA90300

White Titanium



Power supply	Undimmable	DALI/0-10/1-10/PUSH	Dimmable APP
 320 W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 ⓘ 395x165x107h	Code TA67001	Code TA67101	Code TA67101APP
 240 W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 ⓘ 395x165x107h	TA62301	TA62401	TA62401APP
 150 W Recessed power supply kit for suspension modules 230VAC-48VDC IP20 ⓘ 395x165x107h	TA62101	TA62201	TA62201APP
 240 W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 ⓘ 400x110x50h	☐ TA61301 ☒ TA61522	☐ TA61401 ☒ TA61622	☐ TA61401APP ☒ TA61622APP
 150 W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 ⓘ 400x110x50h	☐ TA60901 ☒ TA61122	☐ TA61001 ☒ TA61222	☐ TA61001APP ☒ TA61222APP
 320 W Remote box power supply kit 230VAC-48VDC IP20 ⓘ 313x243x57,5h		TA68000	TA68000APP
 240 W Remote box power supply kit 230VAC-48VDC IP20 ⓘ 313x243x57,5h		TA62500	TA62500APP
 240W Bare power supply ON-OFF 230VAC-48VDC IP20 ⓘ (for dimmable version to be combined with "DV1061") 244x68x38h	TA98000		
 150 W Bare power supply ON-OFF 230VAC-48VDC IP20 ⓘ (for dimmable version to be combined with "DV1061") 244x68x38h	TA98100		
 DALI/0-10/1-10/PUSH SELV Interface 103x67x21h		DV1061	

Optional control devices - BLL wireless switch

	Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	DV1080APP
---	---	------------------



Turn Around lighting appliances



Vector Turn Around






VECTOR TURN AROUND

Titanium



SP XF WF



MacAdam 3SDCM
CRI = 90

IP20



Vector 20

W	Beam	Flux	CCT
3,5 W	SP 16°	179 lm	2700K
		188 lm	3000K
3 W		184 lm	4000K
3,5 W	XF 23°	171 lm	2700K
		180 lm	3000K
		189 lm	4000K
	WF 35°	168 lm	2700K
		177 lm	3000K
		186 lm	4000K

Dimmable**

Code
TB00122

TB01122

TB03122

TB00222

TB01222

TB03222


TB00322

TB01322

TB03322



Life L90 (6k)>36300h



Vector 30

W	Beam	Flux	CCT
6,5 W	SP 12°	329 lm	2700K
		329 lm	3000K
		329 lm	4000K
7 W	XF 16°	335 lm	2700K
		335 lm	3000K
		335 lm	4000K
	WF 30°	292 lm	2700K
		292 lm	3000K
		292 lm	4000K

Dimmable**

Code
TB10122

TB11122

TB13122

TB10222

TB11222

TB13222


TB10322

TB11322

TB13322



Life L70 (18k)>109000h



** Use of Artemide power units is mandatory.

VECTOR TURN AROUND

Titanium


SP XF WF




MacAdam 3SDCM
*MacAdam 2SDCM
CRI = 90


IP20


90°
360°

Vector 40				Dimmable**
W	Beam	Flux	CCT	Code
10 W	SP 14°	544 lm	2700K	TB20122
		541 lm	3000K	TB21122
		541 lm	4000K	TB23122
	*XF 21°	543 lm	2700K	TB20222
		584 lm	3000K	TB21222
		626 lm	4000K	TB23222
	*WF 28°	491 lm	2700K	TB20322
		529 lm	3000K	TB21322
		566 lm	4000K	TB23322



Life L90 (10k) 60500h



		Vector 40
		Code
	Accessories holder	AP90100
	Lens for elliptical emission	AP90200
	Soft filter	AP90300
	Anti-dazzle louvre	Code AP90400

** Use of Artemide power units is mandatory.



VECTOR PENDANT TURN AROUND

Titanium



SP

XF

WF



MacAdam 3SDCM
* MacAdam 2SDCM
CRI = 90

IP20



Vector 30 Pendant


W	Beam	Flux	CCT
6,5 W	SP 12°	329 lm	2700K
		329 lm	3000K
		329 lm	4000K
7 W	XF 16°	335 lm	2700K
		335 lm	3000K
		335 lm	4000K
	WF 30°	292 lm	2700K
		292 lm	3000K
		292 lm	4000K

Dimmable**

Code
TB30122
TB31122
TB33122
TB30222
TB31222
TB33222
TB30322
TB31322
TB33322



Life L70 (24k) 145000h



Vector 40 Pendant


W	Beam	Flux	CCT
10 W	SP 14°	544 lm	2700K
		541 lm	3000K
		541 lm	4000K
*XF 21°	543 lm	2700K	
		584 lm	3000K
		626 lm	4000K
*WF 28°	491 lm	2700K	
		529 lm	3000K
		566 lm	4000K

Dimmable**

Code
TB40122
TB41122
TB43122
TB40222
TB41222
TB43222
TB40322
TB41322
TB43322



Life L90 (10k) 60500h



No cuttable wire.
Clips included to adjust the length.

** Use of Artemide power units is mandatory.

Sharp Turn Around



SHARP SECURLOCK TURN AROUND

Titanium



XF

WF




MacAdam 2SDCM
MacAdam 3SDCM*
CRI = 90


IP20

Sharp 8					Dimmable	
	W	Beam	Flux	CCT	Code	
8 LED	14 W	XF 26°	1071 lm*	2700K	TB50222	
			1071 lm	3000K	TB51222	
			1147 lm	4000K	TB53222	
		XF 62°	1139 lm*	2700K	TB50422	
			1139 lm	3000K	TB51422	
			1219 lm	4000K	TB53422	



Life L70 (18k) 109000h







Sharp 12					Dimmable	
	W	Beam	Flux	CCT	Code	
12 LED	19 W	XF 26°	1607 lm*	2700K	TB60222	
			1607 lm	3000K	TB61222	
			1720 lm	4000K	TB63222	
		XF 62°	1708 lm*	2700K	TB60422	
			1708 lm	3000K	TB61422	
			1829 lm	4000K	TB63422	



Life L70 (18k) 109000h





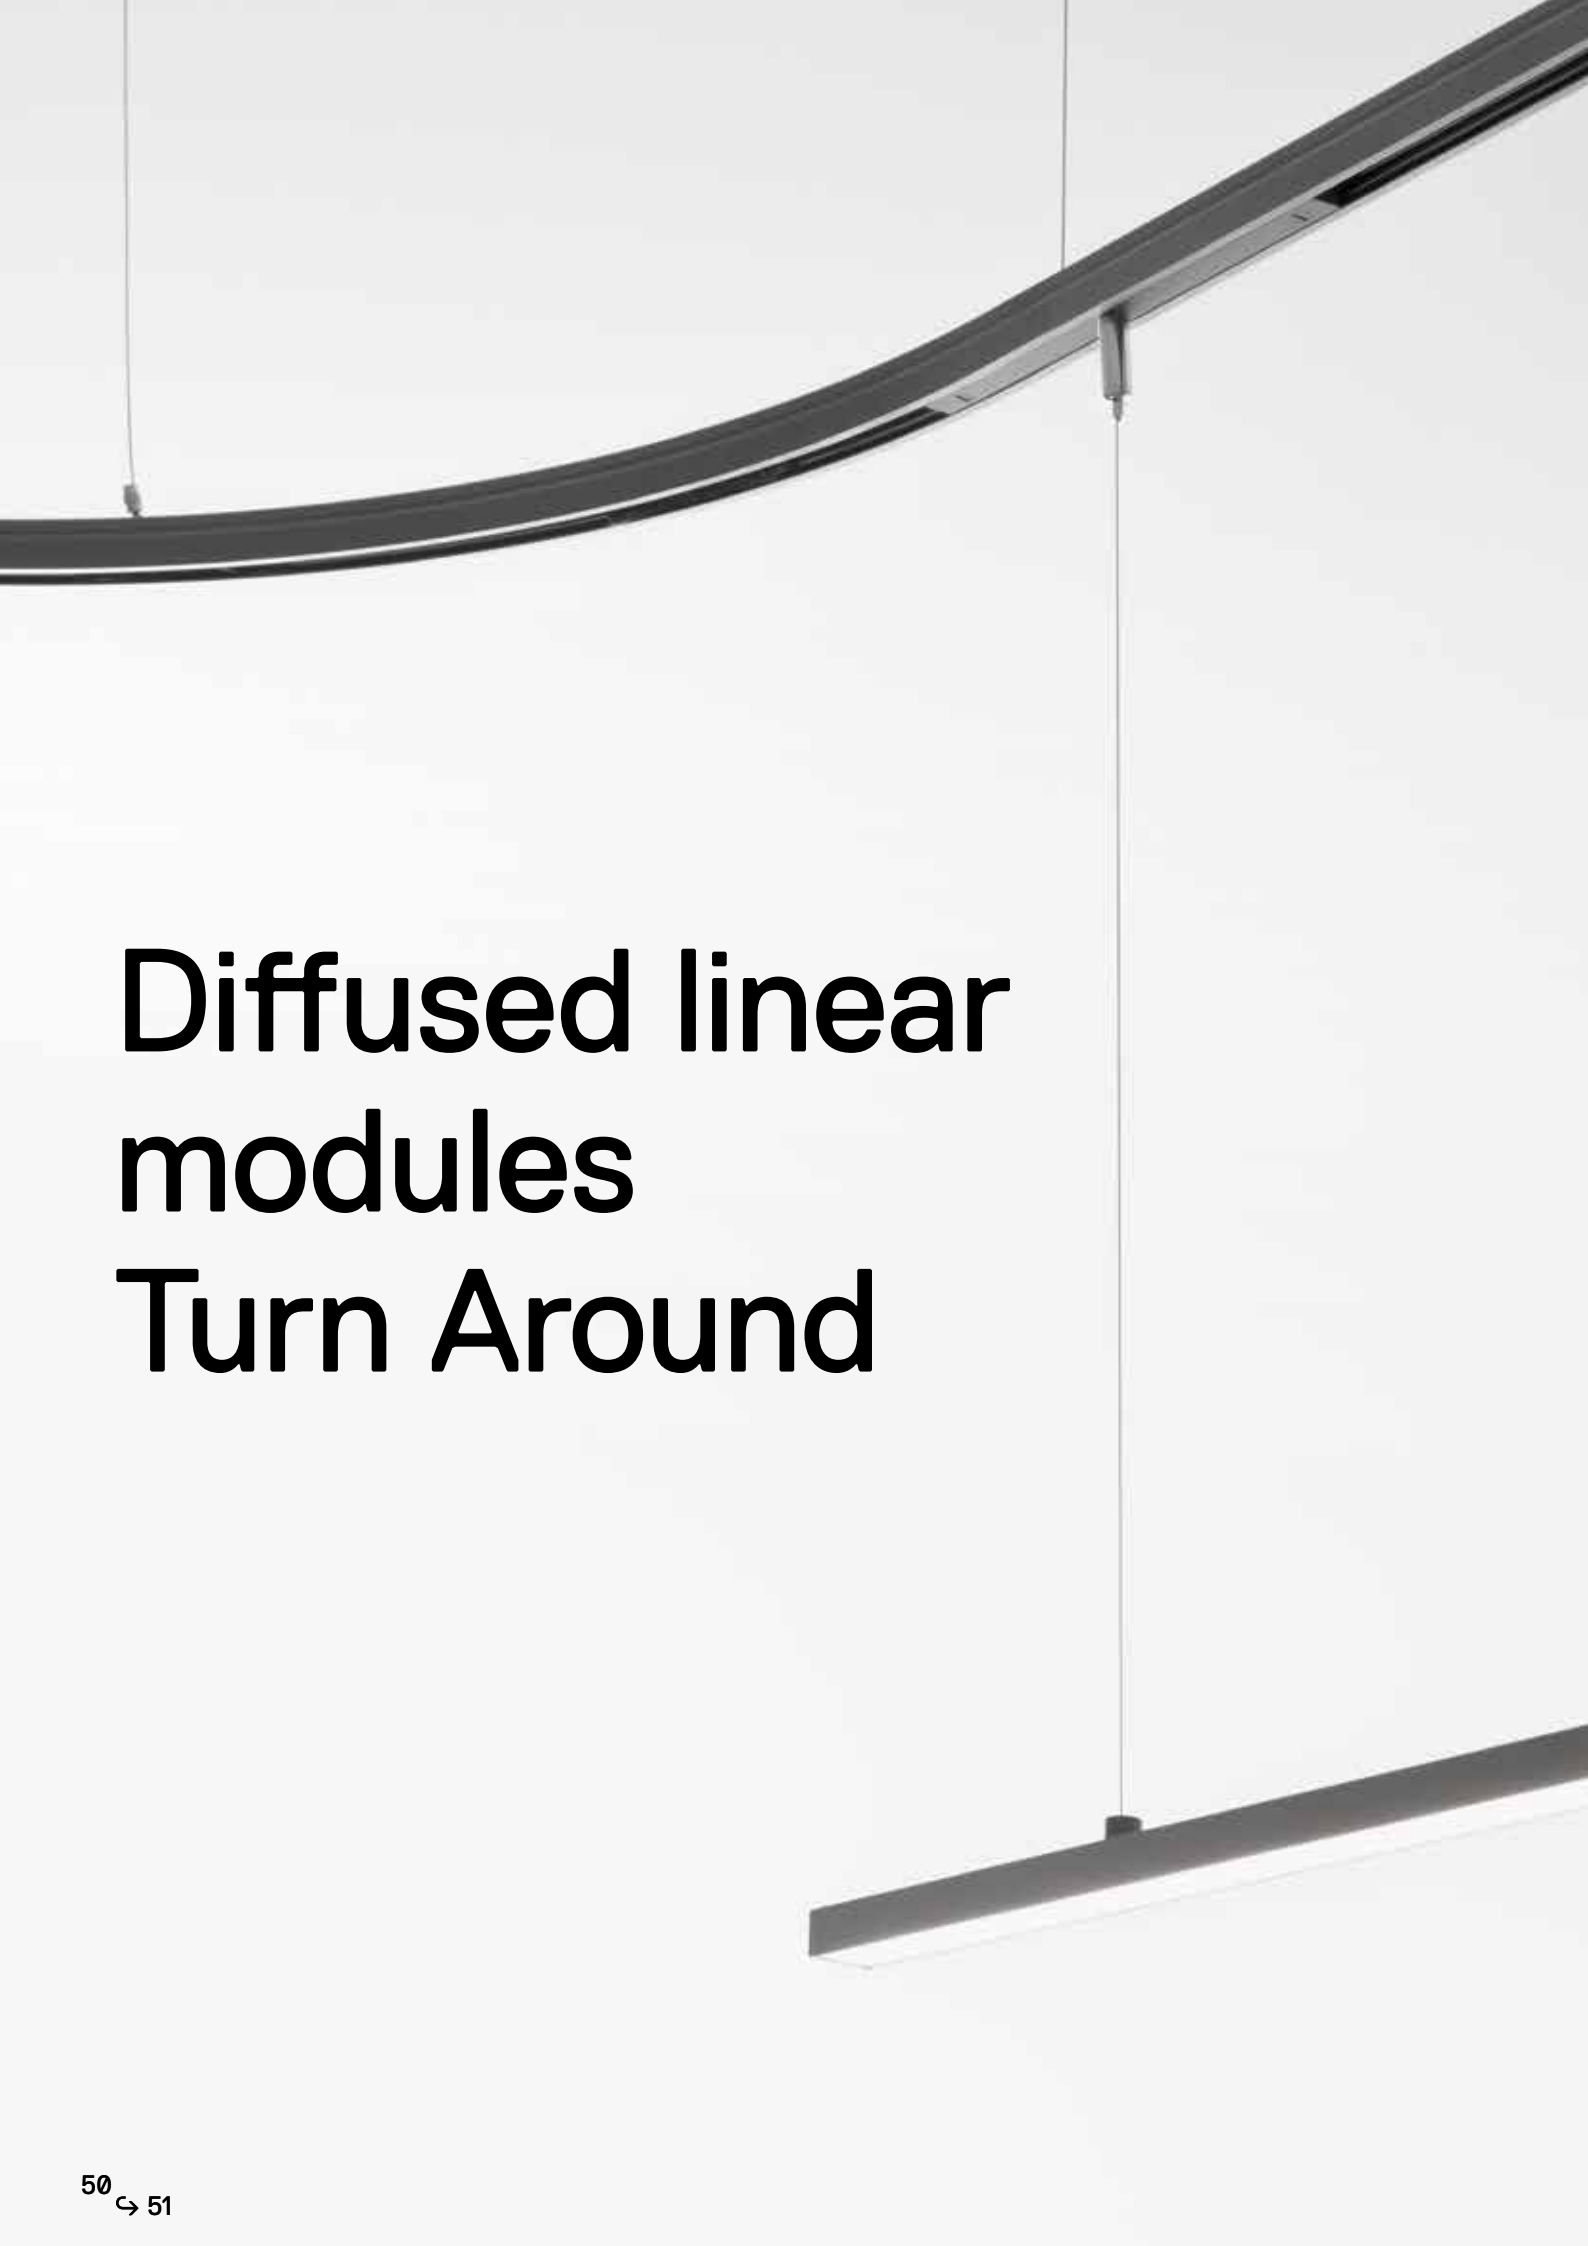

Diffused linear modules Turn Around

DIFFUSED LINEAR MODULES TURN AROUND

Titanium



MacAdam 3SDCM
CRI = 90



IP20

Diffused linear module		Flux	CCT
	W		
600 mm	15 W	1340 lm	2700K
		1421 lm	3000K
		1421 lm	4000K
1200 mm	30 W	2510 lm	2700K
		2843 lm	3000K
		2748 lm	4000K

Dimmable
Code
TD21022
TD22022
TD24022
TD31022
TD32022
TD34022



Life L70 (18k) 102000h

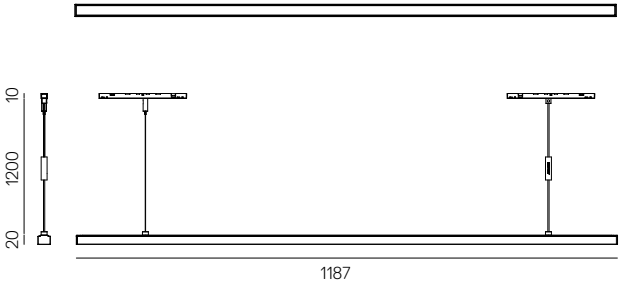

No cuttable wire.
Clips included to adjust the length.



Diffused flexible modules Turn Around

DIFFUSED LINEAR MODULES TURN AROUND

Titanium



MacAdam 3SDCM
CRI = 90

IP20


Diffused flexible modules*				Dimmable	
	W	Flux	CCT	Code	
2000 mm	18 W	1000 lm	3000K	TB91922	
4500 mm	39 W	2252 lm	3000K	TB90922	



* The adapter of the diffused flexible module can be fixed only in linear module.

Square modules Turn Around



DIFFUSED LINEAR MODULES TURN AROUND

Titanium



MacAdam 3SDCM


CRI = 90

Life L70 (6k) 36000h


IP20




Horizontal square diffused			Dimmable
W	Flux	CCT	Code
18 W	1001 lm	3000K	TB81922

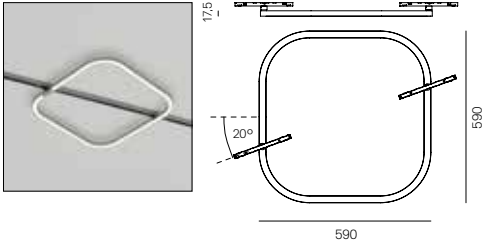


Vertical square diffused			Dimmable
W	Flux	CCT	Code
18 W	1001 lm	3000K	TB71922

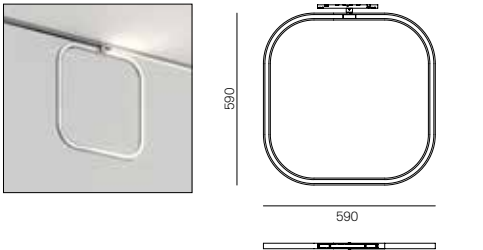

Horizontal square track*		Code
		TB99922

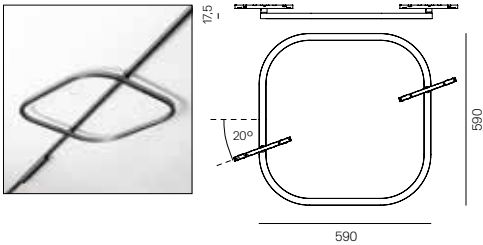

*Insets horizontal square track

	Insets	N° Max
	Vector 20	3
	Vector 30	3
	Vector 40	3
	Vector 30 Pendant Track	3
	Vector 40 Pendant Track	3
	Sharp 8x	3





Wall Washer Turn Around



TURN AROUND WALL WASHER

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20

Delivery time on demand

MacAdam 3SDCM



Life L70 (6K) 50000h

CRI = 90

IP20

Length	W	Flux	CCT
600 mm	11W	1038 lm	2700K
		1070 lm	3000K
		1145 lm	4000K
1200 mm	21W	2076 lm	2700K
		2140 lm	3000K
		2290 lm	4000K

Code
WW101. 01/04 15/18/20
WW111. 01/04 15/18/20
WW121. 01/04 15/18/20
WW142. 01/04 15/18/20
WW152. 01/04 15/18/20
WW162. 01/04 15/18/20

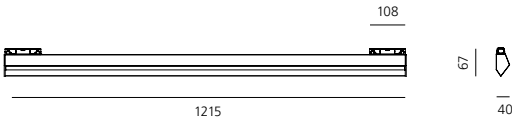



**Turn Around
is inclusive**





LIGHTING APPLIANCES TURN AROUND


Black	White	SP	XF	WF	MacAdam 2SDCM* MacAdam 3SDCM CRI = 90 Delivery time on demand 2700K - 4000K	IP20
						

GOPLE MINI PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Flux	CCT	Dimmable Code
9 W	836 lm	2700K	TC10401
	850 lm	3000K	TC11401



Life L70 (9k) 50000h

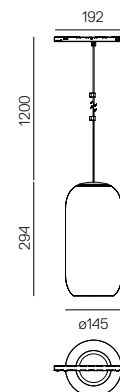


GOPLE 60 PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
10 W	Black	SP 13°	557 lm	2700K	TC50104
			557 lm	3000K	TC51104
			557 lm	4000K	TC53104
		XF 20°*	556 lm	2700K	TC50204
			598 lm	3000K	TC51204
			641 lm	4000K	TC53204
		WF 28°*	503 lm	2700K	TC50304
			542 lm	3000K	TC51304
			580 lm	4000K	TC53304



Life L70 (24k) 145000h




GOPLE 80 PENDANT TURN AROUND, BIG - BJARKE INGELS GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
19 W	Black	SP 16°	1739 lm	2700K	TC40104
			1779 lm	3000K	TC41104
			1845 lm	4000K	TC43104
		XF 22°	1837 lm	2700K	TC40204
			1879 lm	3000K	TC41204
			1949 lm	4000K	TC43204
		WF 32°	1986 lm	2700K	TC40304
			2031 lm	3000K	TC41304
			2107 lm	4000K	TC43304



Life L70 (9k) 50000h



No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

White



MacAdam 2SDCM

CRI = 90

Life L70 (24k) 145000h

IP20



SPHERE 9 PENDANT TURN AROUND

W	Flux	CCT
4 W	346 lm	2700K
	373 lm	3000K

Dimmable


Code

TC30406

TC31406



Life L70 (11k) 61000h

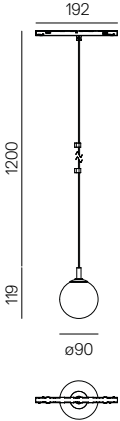

SPHERE 14 PENDANT TURN AROUND

W	Flux	CCT
8,5 W	628 lm	2700K
	677 lm	3000K

Dimmable


Code

TC20406

TC21406



Life L70 (19k) 105000h

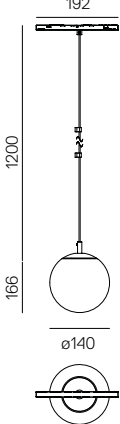



No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

Aluminium

Brass

MacAdam 2SDCM

CRI = 90

IP20

ORSA 21 PENDANT TURN AROUND, FOSTER + PARTNERS

W	Flux	CCT
8 W	525 lm	2700K
	562 lm	3000K

Dimmable


Code

TC60404

TC61404



Life L70 (9k) 50000h

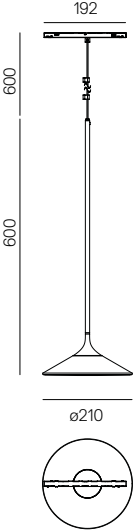

UNTERLINDEN PENDANT TURN AROUND, HERZOG & DE MEURON

W	Colour	Flux	CCT
7 W	Brass	339 lm	2700K
	Aluminum		
	Brass	349 lm	3000K
	Aluminum		

Dimmable

Code

TC70406


TC70407

TC71406

TC71407



Life L70 (19k) 105000h

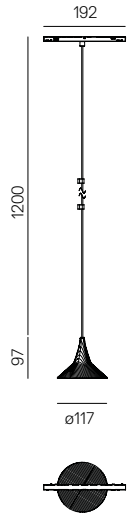



No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

Black



MacAdam 3SDCM
CRI = 90




DISCOVERY 70 VERTICAL PENDANT TURN AROUND, ERNESTO GISMONDI

W	Colour	Flux	CCT	Dimmable Code
29 W	Black	2317 lm	3000K	TC01404



Life L70 (9k) 50000h

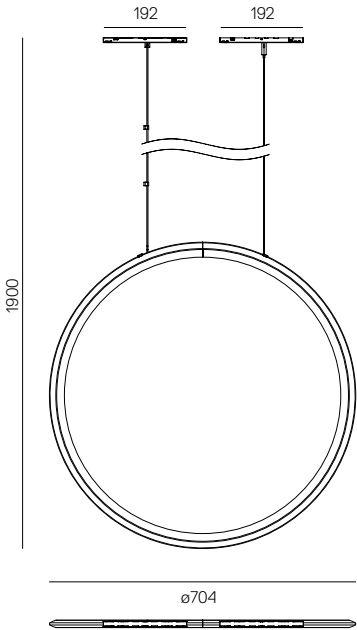

No cuttable wire.
Clips included to adjust the length.



LIGHTING APPLIANCES TURN AROUND

Anthracite



04

Blue



07

Red



08

White/Grey



01

Yellow



06

MacAdam 2SDCM

CRI = 90

Life L70 (10k) 60500h

IP20



IXA SPOT TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Color	Dimmable Code
9 W	465 lm	3000K	Anthracite	TC81004
			Blue	TC81007
			Red	TC81008
			White/Grey	TC81001
			Yellow	TC81006



192



94


Ø 100

IXA 50 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Color	Dimmable Code
9 W	465 lm	3000K	Anthracite	TC81104
			Blue	TC81107
			Red	TC81108
			White/Grey	TC81101
			Yellow	TC81106



663



Ø 100

IXA 100 TURN AROUND, FOSTER + PARTNERS INDUSTRIAL DESIGN

W	Flux	CCT	Color	Dimmable Code
9 W	465 lm	3000K	Anthracite	TC81204
			Blue	TC81207
			Red	TC81208
			White/Grey	TC81201
			Yellow	TC81206



1140



Ø 100













Turn Around floor

Carlotta de Bevilacqua
2023

Turn Around floor shares the same design principles of Turn Around system starting from parameters of sustainability, reduction, lightness, optoelectronic intelligence and interaction. Like the system it is perfect for a last-minute choice able to add dynamic light quality to the space. The slender and minimal structure integrates two different lighting performances to meet the needs of any space, from office workstations to meeting rooms, hospitality or residential spaces.

Turn Around floor combines to the direct controlled emission also an indirect diffuse emission which can be managed separately both from the luminaire body.


The high efficiency and the flexibility of emissions management make Turn Around floor an optimal solution for intelligent energy saving that enhances the experience and the awareness of the user.



For further information on Turn Around floor
visit artemide.com



Refractive emission

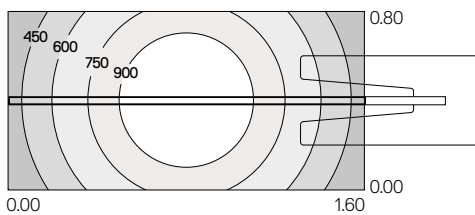


Refractive Direct
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 708 \text{ lx}$ $u_0 = 0,444$

High Efficiency
more than 70%


High Efficacy
up to 115 lm/W

High Glare Control
 $UGR < 16$

CRI 90

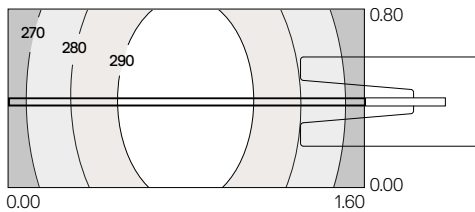

Refractive Indirect
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 281 \text{ lx}$ $u_0 = 0,942$

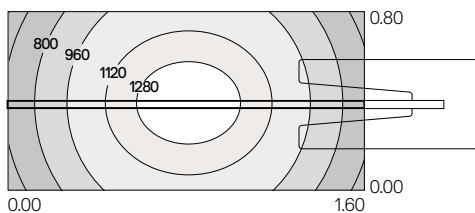

Refractive Direct + Indirect
Head h 2015 mm - Desk h 750 mm
 $E_{av} = 989 \text{ lx}$ $u_0 = 0,584$


Lighting calculation parameters used for Isolux diagrams: office with a single workstation.

Length x width x height: 5.00 x 5.00 x 2.70 m

Reflection factor ceiling/wall/floor: 70/50/20%

Desk: 1.60 x 0.80 x 0.75 m

Maintenance factor: 0.90 WF

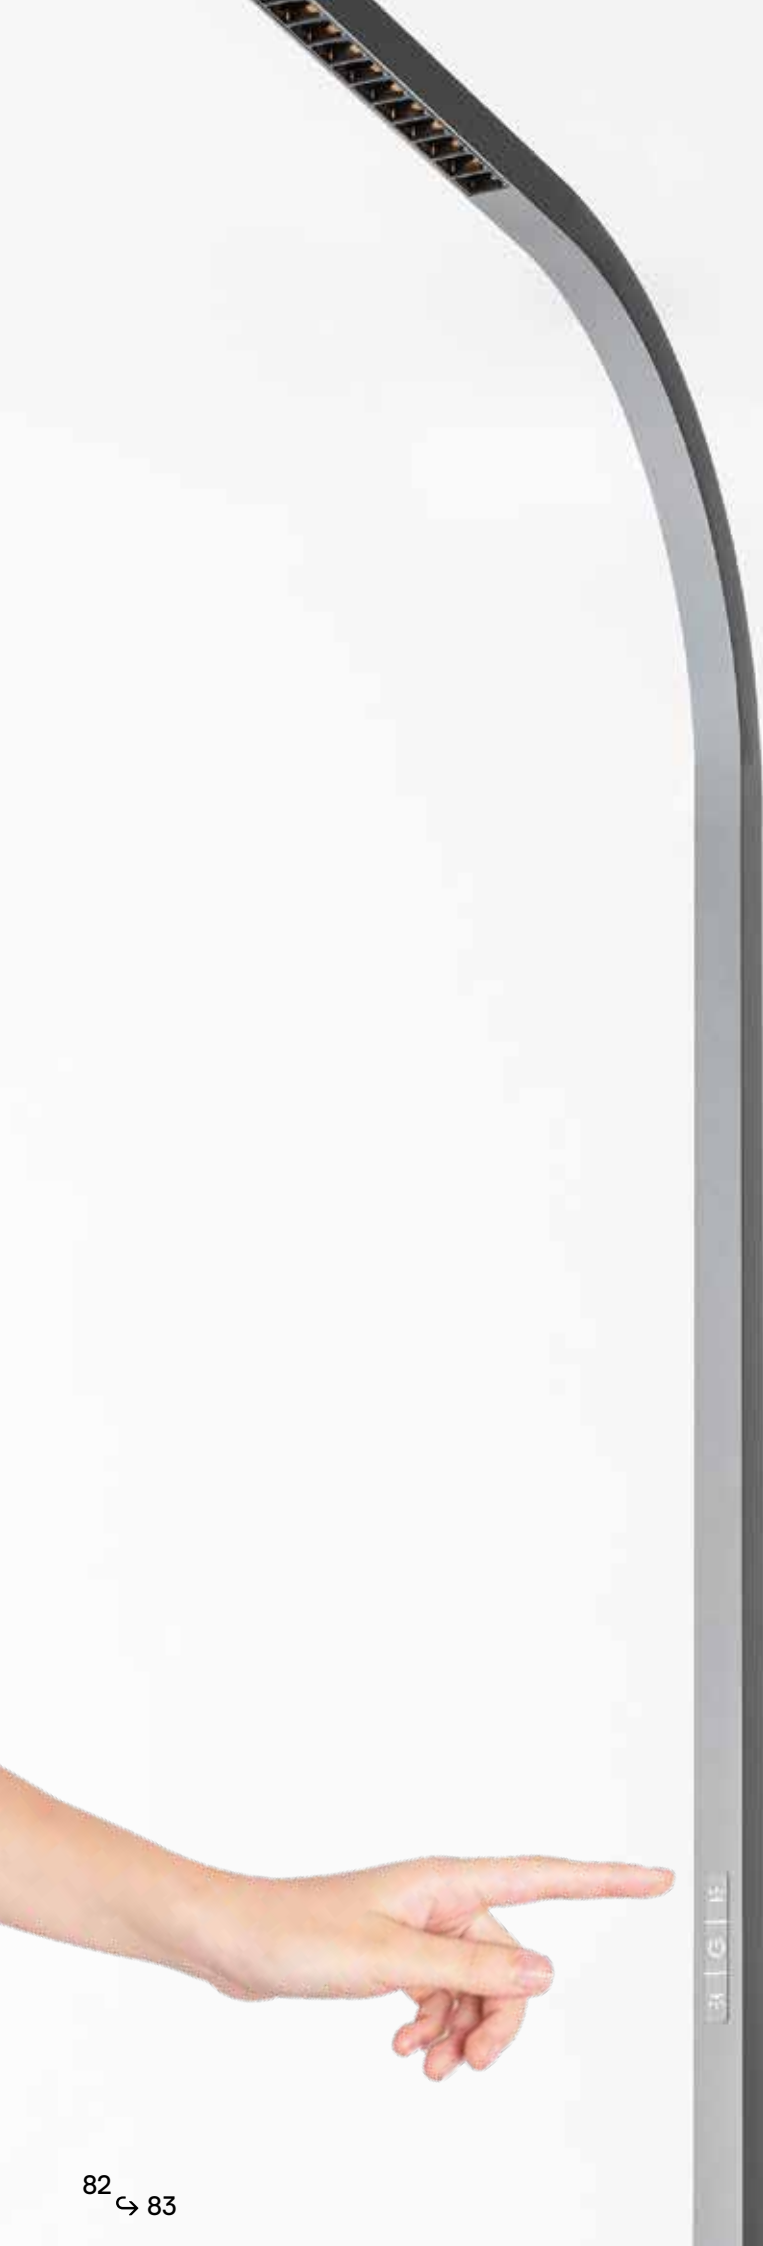

Capacitive board for light management



Indirect emission

On/Off

Dimming



Direct + Indirect emission

On/Off

Intensity setting



Direct emission

On/Off

Dimming

Sensor

Intensity setting and daylight

PIR (proximity)





Workplace

Direct and indirect emission

Direct emission

Indirect emission





TURN AROUND FLOOR


Titanium




MacAdam 3SDCM
CRI = 90
Life L70 (17k) 102000h

IP20


Turn Around floor, direct + indirect emission				Dimmable	Dimmable + sensor*
Weight	W	Flux	CCT	Code	Code
20 Kg	17 W direct	1824 lm	3000K	TE22022	TE22122
		6197 lm	3000K		
	53 W indirect	1824 lm	4000K	TE23022	TE23122
		6197 lm	4000K		

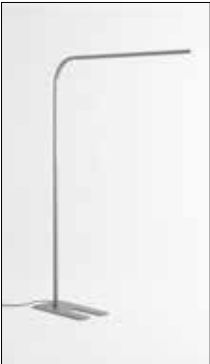

*Sensor functionalities:
- Intensity setting and daylight (touching for 3 seconds the central part of the controller)
- PIR (proximity)

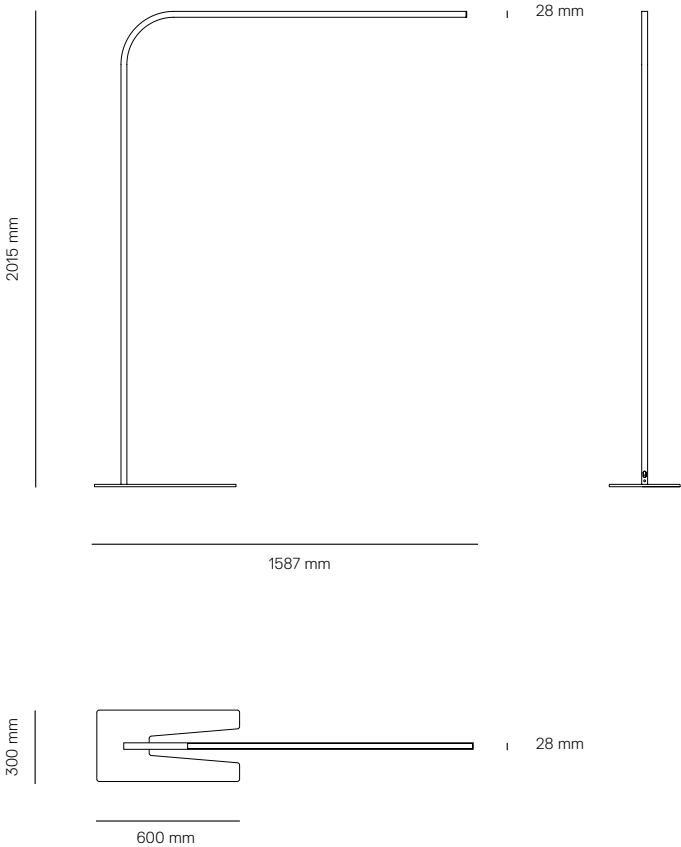








Turn Around suspension


Carlotta de Bevilacqua
2024

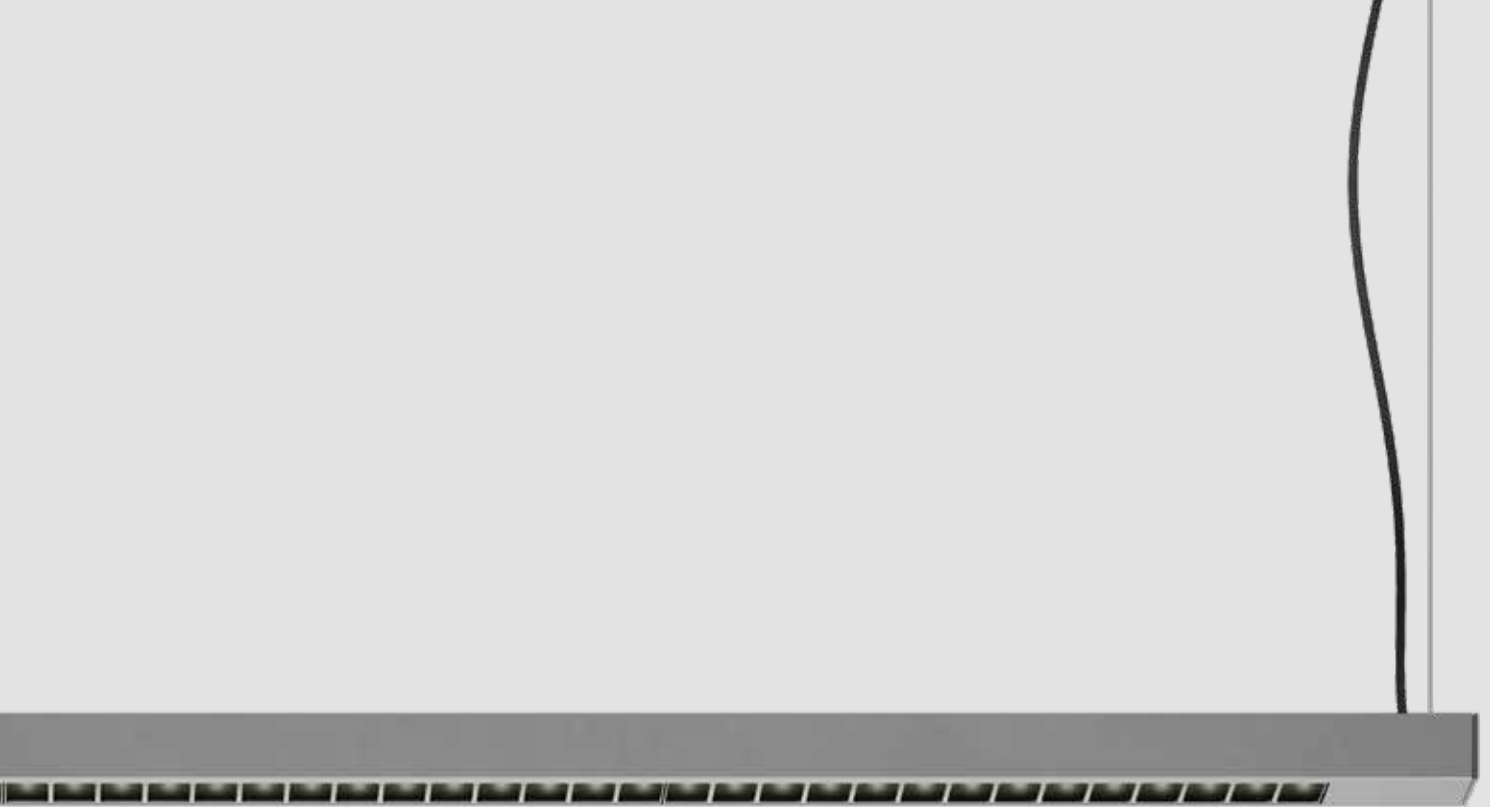

Turn Around suspension shares the same design principles of Turn Around system starting from parameters of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction. It also shares the same components of Turn Around floor, integrating in the minimal structure two different lighting performances.

Turn Around suspension combines a direct controlled emission to an indirect diffused emission manageable together. The high efficiency and the perfect control of the lighting emission make Turn Around suspension an optimal solution for workplaces.

Controlled direct emission

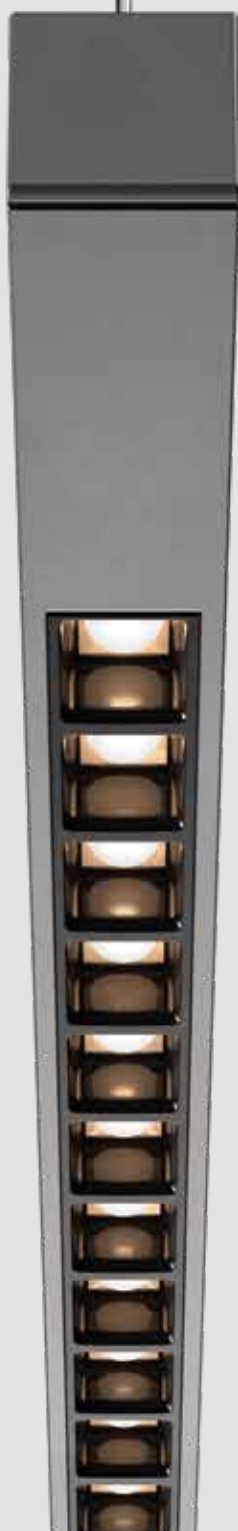

Refractive emission

High Efficiency
more than 70%

High Efficacy
up to 115 lm/W

High Glare Control
UGR<16


CRI 90

Diffused indirect emission



Combined management

Direct and Indirect emission
DALI/Push

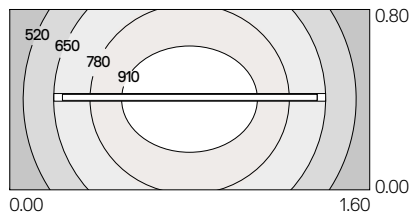

Refractive Direct + Diffused Indirect
 Head h 2100 mm - Desk h 750 mm
 $E_{av} = 732 \text{ lx}$ $u_o = 0,526$
 Power: 17W Direct + 17W Indirect
 Flux: 1940 lm + 7500 lm (3000K)

Lighting calculation parameters used for Isolux diagrams:

Office with a single workstation.


Length x width x height: 5.00 x 5.00 x 2.70m

Reflection factor ceiling/wall/floor: 70/50/20%

Desk: 1.60 x 0.80 x 0.75m

Maintenance factor: 0.90 WF

Turn Around suspension

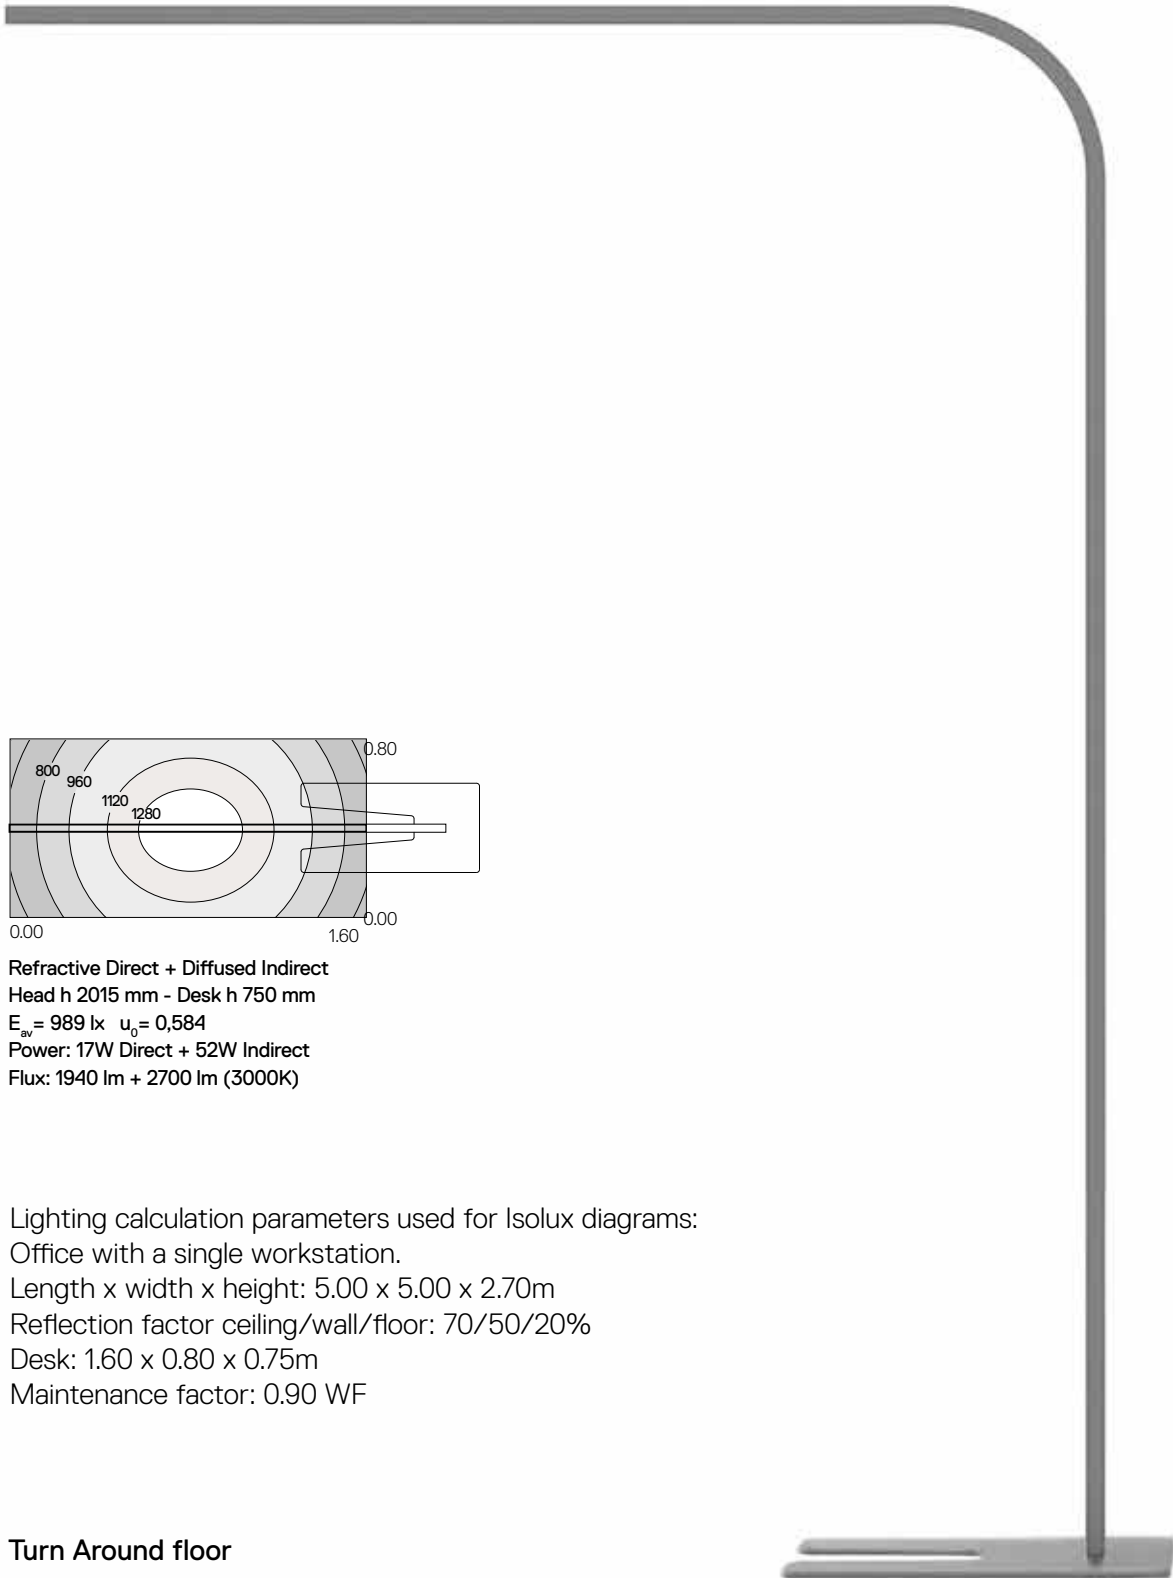



TURN AROUND SUSPENSION



Titanium



MacAdam 3SDCM
CRI = 90
Life L70 (17k) 102000h

IP20
⊕

Turn Around suspension, direct + indirect emission			Dimmable DALI/Push
W	Flux	CCT	Code
17 W direct	1724 lm	2700K	TF21022
17 W indirect	2640 lm		
	1830 lm	3000K	TF22022
	2818 lm		
	1940 lm	4000K	TF23022
	2700 lm		

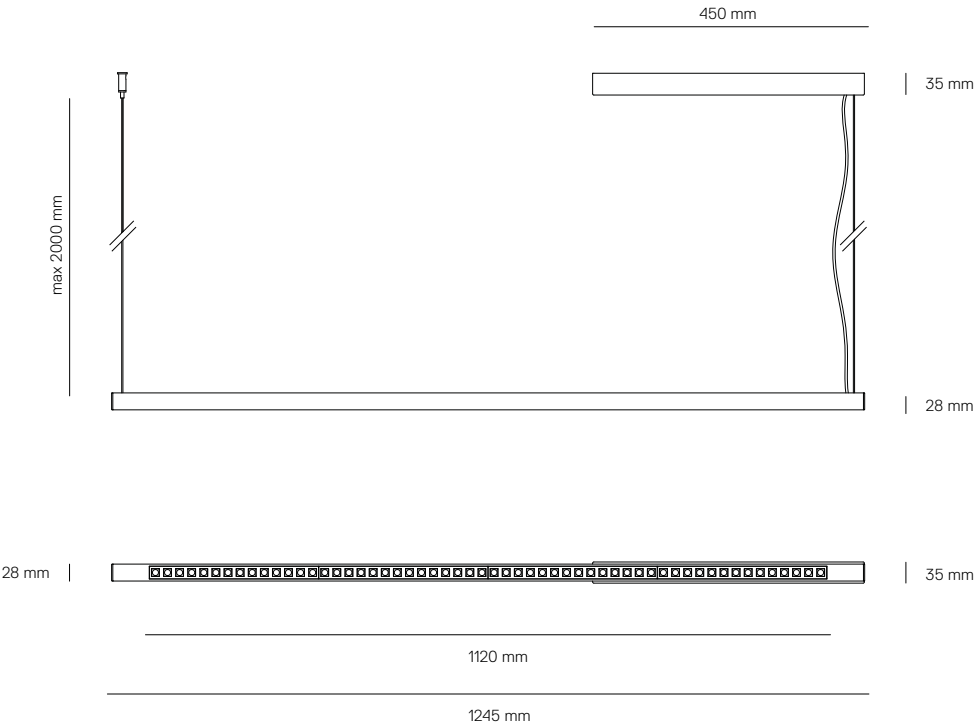





Headquarters

Artemide S.p.A.

Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

July 2024